

PCB LAYOUT

**SPECIFICATIONS**

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature: -40°-+105°C
- \* Max Processing Temp: 230° for 30~60 seconds  
(260° for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

**RoHS Compliant**

TOLERANCES ARE



**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE


SIZE A4

X. ± 0.20  
 .X ± 0.15  
 .XX ± 0.10  
 .XXX ± 0.05  
 ANG ±

P PROJECTION



**ORDER INFORMATION**

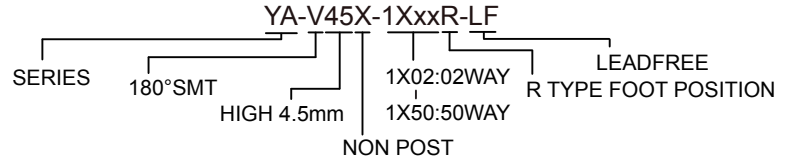

DESCRIPTION: 1.27mm SMD Socket (Straight/Base:4.5mm)