
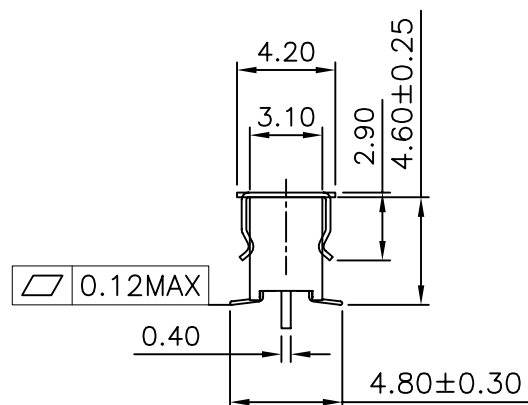
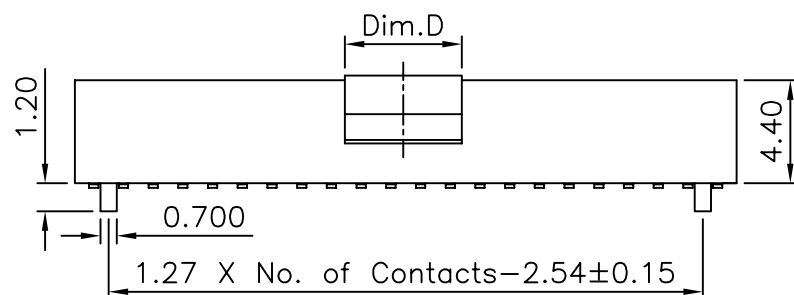



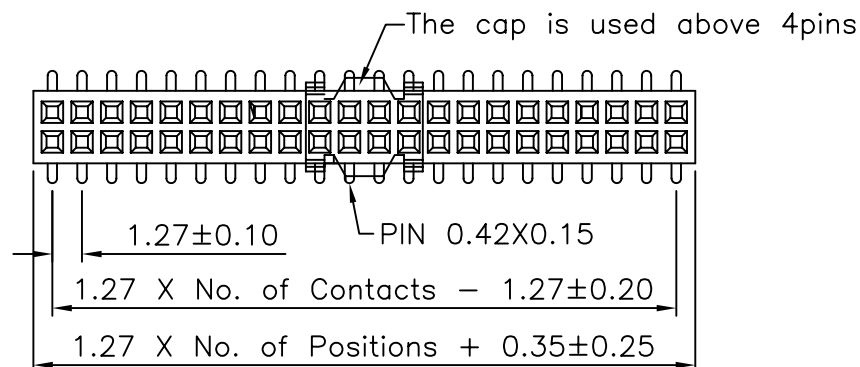

0.12MAX

Dim.D	NOTE
5mm	04~50pins
4mm	03pin


1.Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

2.Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 LCP

Recommended P.C.B Layout
 (Tolerance:±0.05)

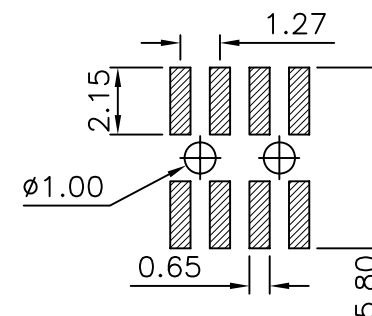

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
 .X±
 .XX±
 .XXX±
 ANG±

照片框

ORDER INFORMATION

YA-V46PC-2Xxx-LF

SERIES
 180°SMT
 CAP
 POST
 HIGH 4.60mm
 LEADFREE
 2X03:06 WAY
 2X50:100 WAY

DESCRIPTION: