

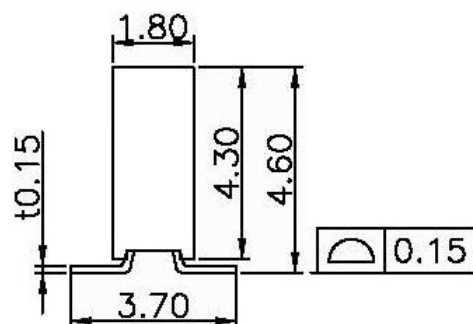
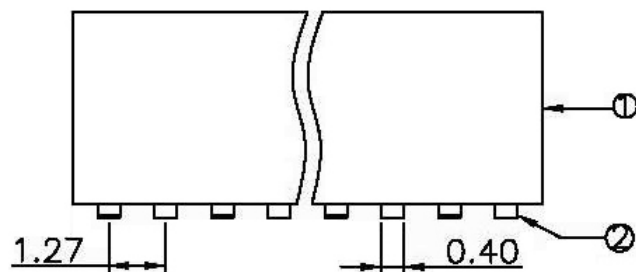


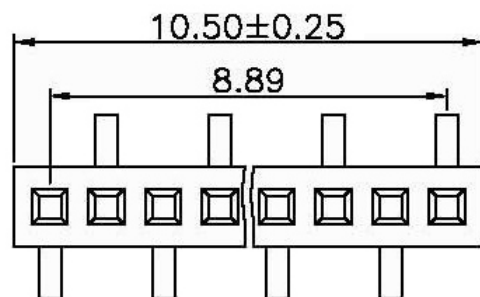

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Normal Force : 60 Grams Average . Temperature Rating : -40°C ~ +105°C . Dielectric Withstanding Voltage : 500V AC/Min .				

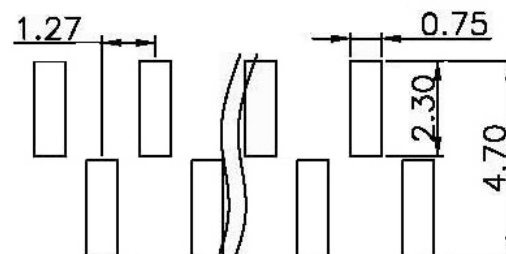

SMT TYPE
P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YA-V46X-1XxxR-LF

SERIES

LEADFREE

R TYPE FOOT POSITION

180°SMT

1X03:03WAY

HIGH 4.6mm

1X40:40WAY

NON POST

DESCRIPTION: