

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Recommended P.C.B Layout

RoHS Compliant


TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

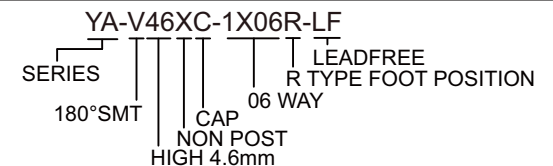

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, SINGLE ROW HEIGHT 4.4mm CAP+TUBE