

SPECIFICATIONS

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION



X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

YA-V46XCR-2Xxx-LF
 SERIES | REEL
 180°SMT HIGH 4.6mm | MYLAR NON POST
 LEADFREE
 2X02:04WAY
 2X50:100WAY

DESCRIPTION: PIN Female 1.27mm SMT 90° H=4.30mm

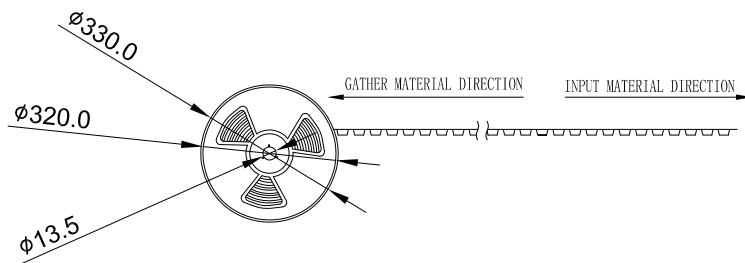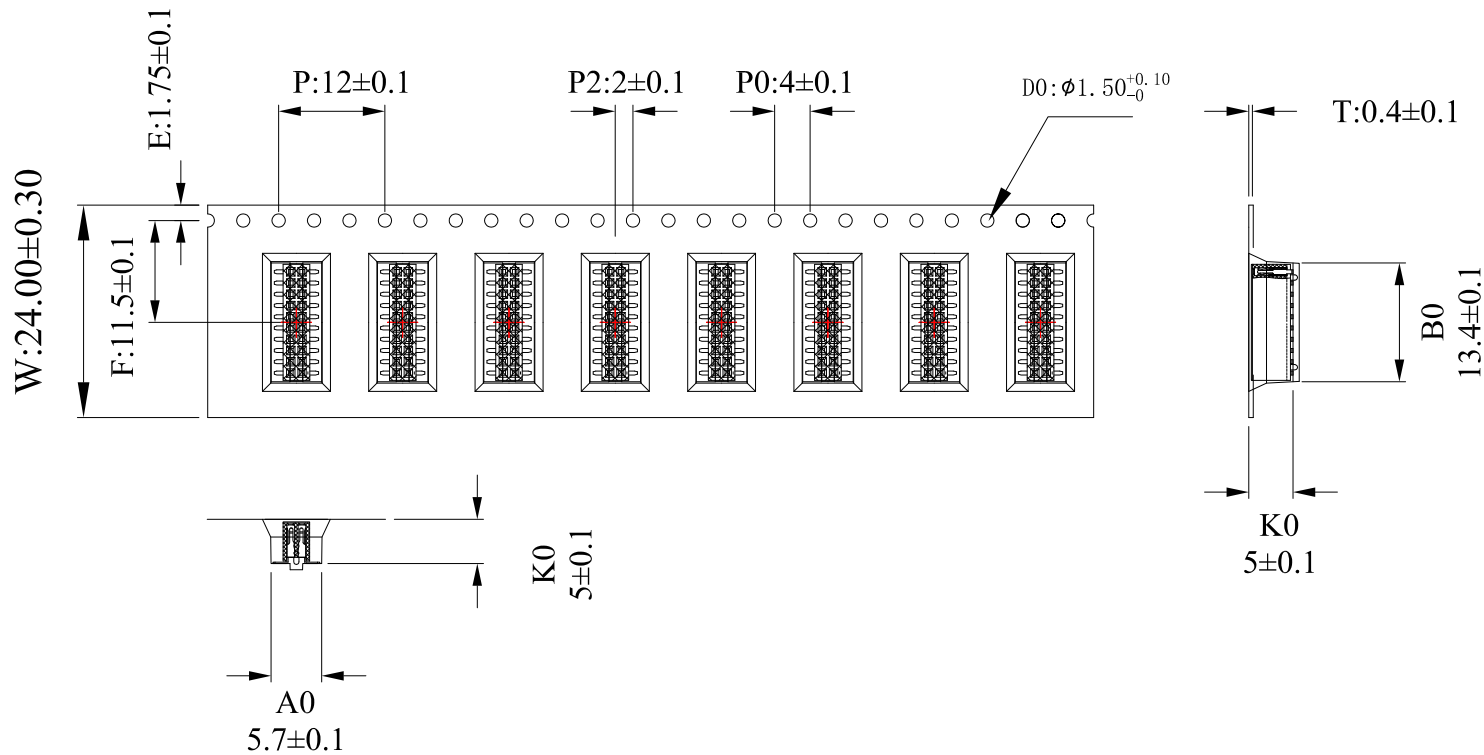

W	24.00±0.3
F	11.50±0.1
T	0.40±0.05
E	1.75±0.1
P	12.00±0.1
P0	4±0.1
P2	2±0.1
A0	5.50±0.1
B0	13.40±0.1
K0	5.10±0.1
D0	1.50 ^{+0.1} ₋₀

料号	2432-01	载带宽度	W24	载带长度	12.48米
数量	1000pcs/卷	装箱数量	12卷/箱	卷盘外径	330mm/13寸
留空	20-1000-20	上带规格	21.3mm*200米	冷封/热封	冷封
模具	FXL-0934	下带颜色	雾透	下带材质	PS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

YA-V46XCR-2Xxx-LF

SERIES LEADFREE
2X02:04WAY
2X50:100WAY
180°SMT REEL
HIGH 4.6mm MYLAR
NON POST

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PIN Female 1.27mm SMT 90° H=4.30mm 包裝圖