



Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Dielectric Withstanding: 500 V AC  
 Contact Resistance: 20 Mm ohms max  
 Operating Temperature: - 40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester,UL 94V-0  
 Standard: LCP

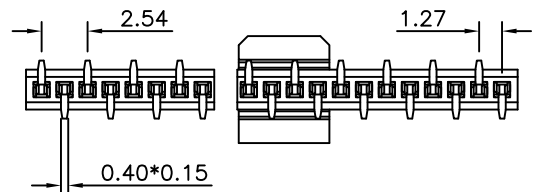

Recommended P.C. Board  
SMD Layout

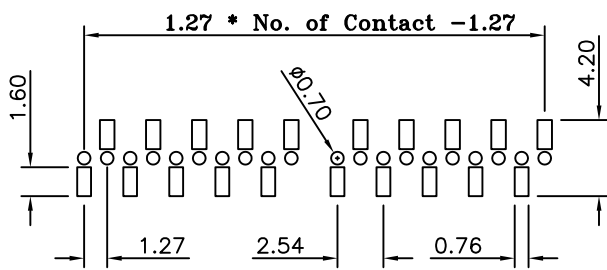

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± 0.10 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

YA-Z37XC-1XxxL-LF  
 SERIES | | | LEADFREE  
 | | | L TYPE FOOT POSITION  
 BOTTOM ENTRY SMT | | | 1X02:02WAY  
 HIGH 3.7mm | | | 1X50:50WAY  
 | | | CAP  
 | | | NON POST

DESCRIPTION: