
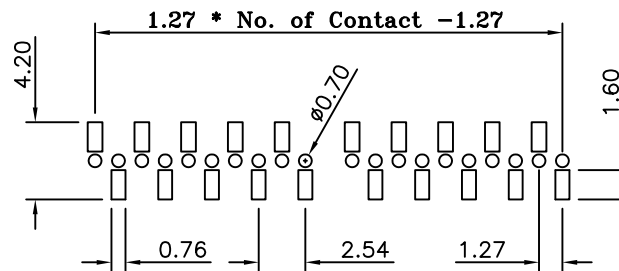


Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: 500 V AC
 Contact Resistance: 20 Mm ohms max
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP

Recommended P.C. Board
 SMD Layout

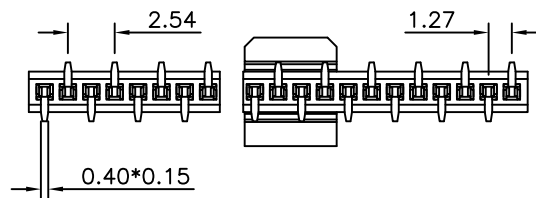

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PJECTION

照片框

ORDER INFORMATION

YA-Z37XC-1XxxR-LF

SERIES | | | | LEADFREE
 | | | | R TYPE FOOT POSITION
 BOTTOM ENTRY SMT | | | | 1X02:02WAY
 HIGH 3.7mm | | | | 1X50:50WAY
 | | | | CAP
 | | | | NON POST

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com