

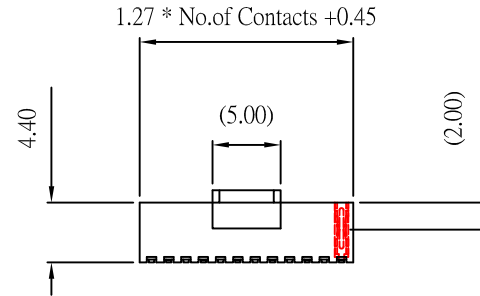



1.27 * No.of Contacts -1.27

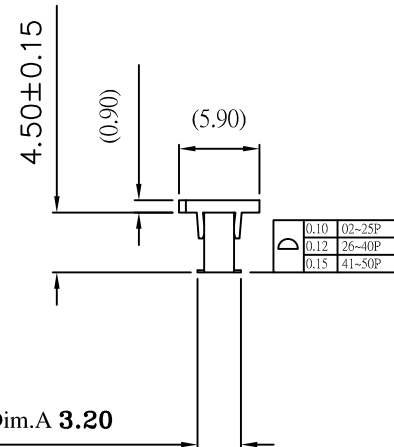


03~10 pin : 0.10 mm MAX.
11~30 pin : 0.20 mm MAX.
31~50 pin : 0.30 mm MAX.

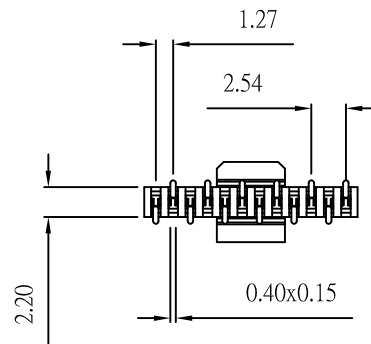

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

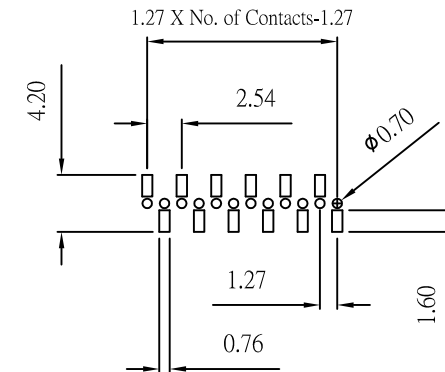

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

YA-Z45XC-1XxxR-LF

SERIES
BOTTOM ENTRY SMT
HIGH 4.5mm
CAP
NON POST
LEADFREE
R TYPE FOOT POSITION
1X03:03WAY
1X50:50WAY

DESCRIPTION: