



Current Rating: 1 Amps  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +105° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Plastic, UL 94V-0  
 Standard: Gold Flash all over

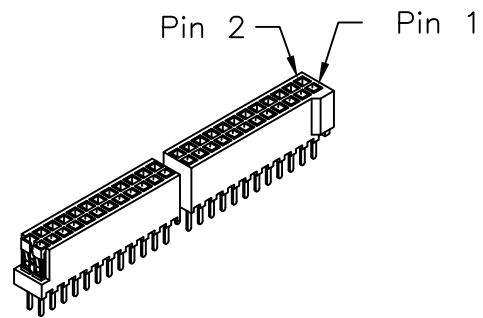

Recommended P.C. Board Hole Layout

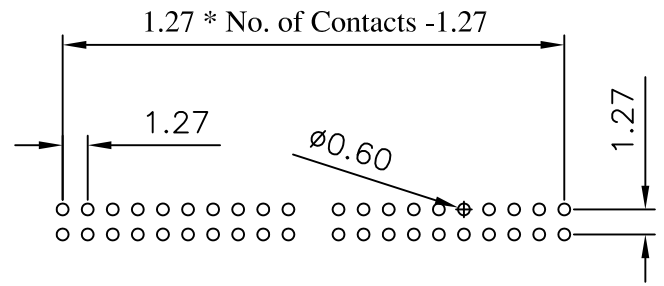

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20


DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION

YAB-D44-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 HIGH 4.4mm  
 DIP 180°

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com