


Recommended P.C. Board  
SMD Layout

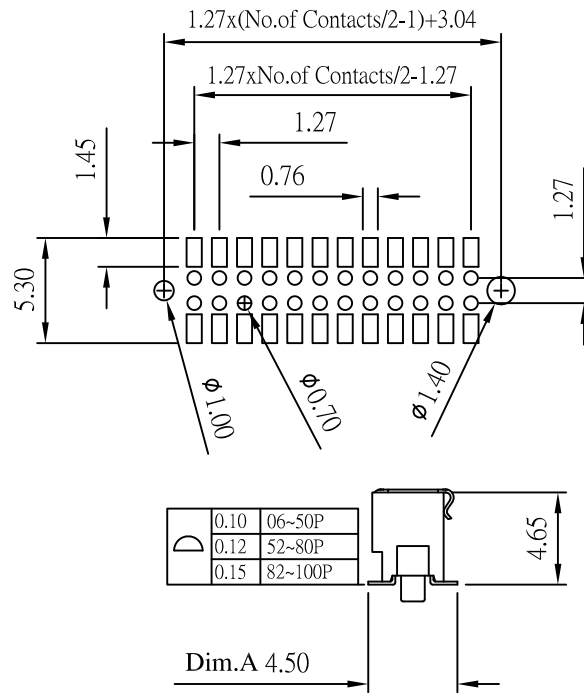

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester,UL 94V-0  
 Standard: LCP  
 Finish: Standard:Gold Flash all over

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

YAB-Z46PC-2Xxx-LF

SERIES

LEADFREE

2X02:04 WAY

2X50:100 WAY

BOTTOM ENTRY SMT

CAP

POST

HIGH 4.65mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: