


LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX

Normal Force : 60 Grams Average .
Temperature Rating : -40°C ~ +105°C .
Dielectric Withstanding Voltage : 500V AC/Min .

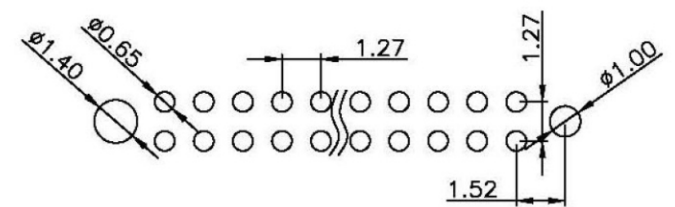

P.C.B LAYOUT

YAX-D43P-2Xxx-LF
LEADFREE

RoHS compliant



PART NO. YAX-D43P-2Xxx

DWG NO. YAX-D43P-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

REVISIONS

HK

DATE