


Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester,UL 94V-0  
 Standard: LCP  
 Finish: Standard:Gold Flash all over

Recommended P.C. Board  
 SMD Layout

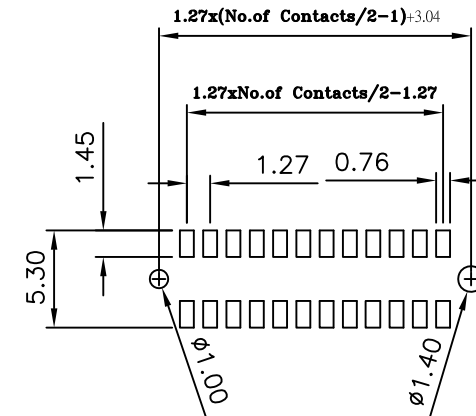

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

PJECTION

照片框

ORDER INFORMATION

YAX-V46PC-2Xxx-LF  
 SERIES | | | LEADFREE  
 | | | 2X02:04 WAY  
 | | | 2X50:100 WAY  
 180° SMT | | CAP  
 | | POST  
 | | HIGH 4.65mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com