

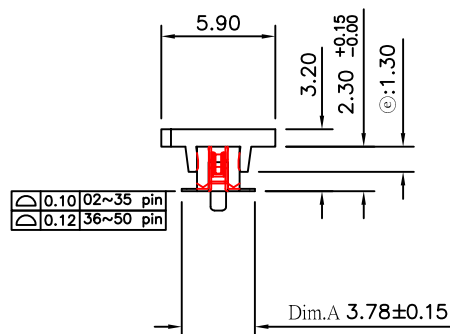


02~10 pin : 0.10mm
11~30 pin : 0.20mm
31~50 pin : 0.30mm

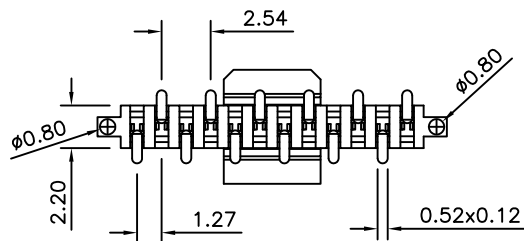

Recommended P.C. Board
SMD Layout

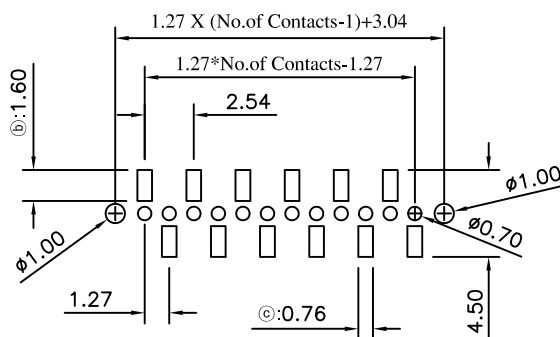

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic, UL 94V-0
Finish: Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

YAX-Z23PC-1XxxR-LF

SERIES

LEADFREE

R TYPE FOOT POSITION

BOTTOM ENTRY SMT

HIGH 2.3mm

POST

CAP

1X02:02WAY

1X50:50WAY

DESCRIPTION: