
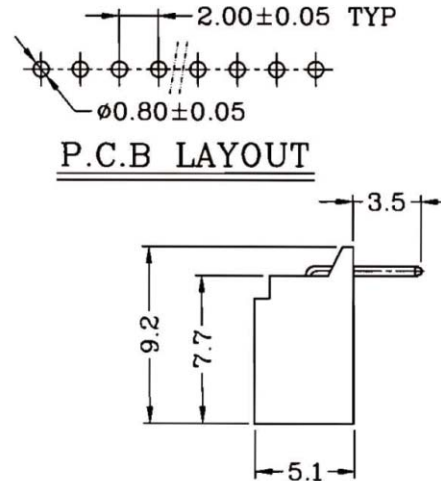


Material: *Insulator: Nylon 66 UL 94V-0 (White)
 *Contact: Brass, Tin Plated
 Note: RoHS and Halogen Free Compliance.

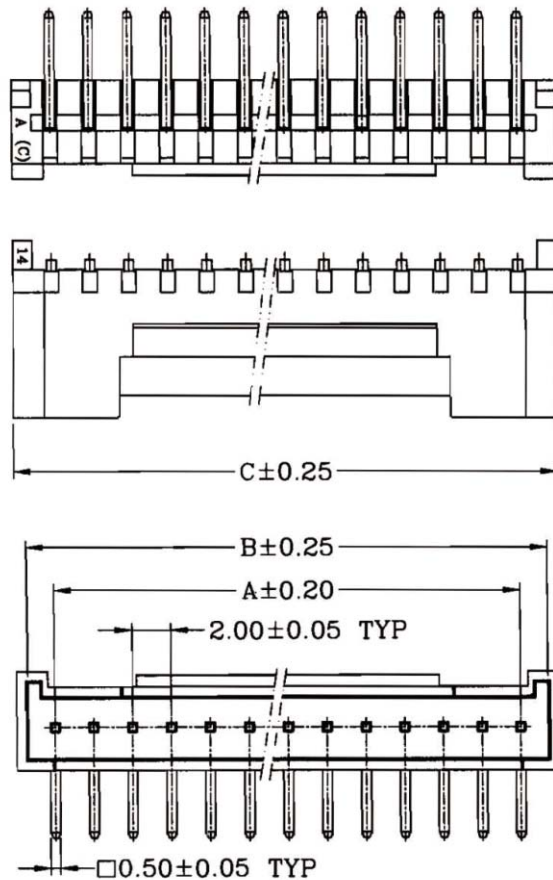

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Pcs/Bag
		A	B	C	
2	YH20-R-02	—	4.75	5.98	1000
3	YH20-R-03	4.00	6.75	7.98	1000
4	YH20-R-04	6.00	8.75	9.98	1000
5	YH20-R-05	8.00	10.75	11.98	1000
6	YH20-R-06	10.00	12.75	13.98	1000
7	YH20-R-07	12.00	14.75	15.98	500
8	YH20-R-08	14.00	16.75	17.98	500
9	YH20-R-09	16.00	18.75	19.98	500
10	YH20-R-10	18.00	20.75	21.98	500
11	YH20-R-11	20.00	22.75	23.98	500
12	YH20-R-12	22.00	24.75	25.98	250
13	YH20-R-13	24.00	26.75	27.98	250
14	YH20-R-14	26.00	28.75	29.98	250
15	YH20-R-15	28.00	30.75	31.98	250
16	YH20-R-16	30.00	32.75	33.98	250

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

YH20-R-xx-LF
 SERIES | LEADFREE
 02-16WAY
 DIP 90°

DESCRIPTION: