
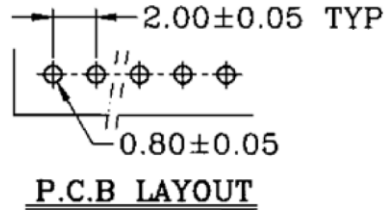


Material: \*Insulator: Nylon 66 UL 94V-0 (White)

\*Contact: Brass, Tin plated.

Note: RoHS and Halogen Free Compliance.

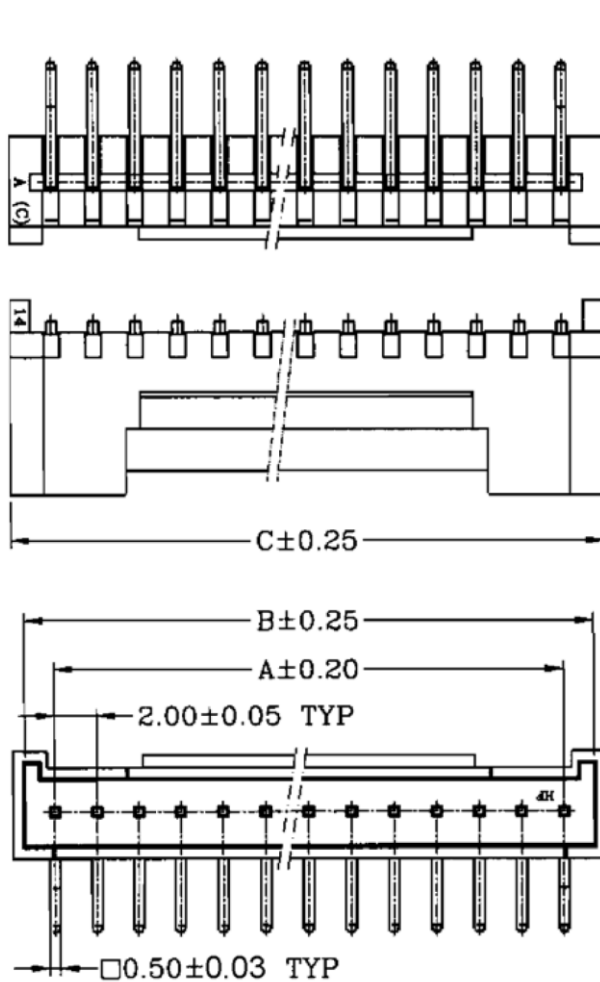

Dimensional Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	2.00	4.75	5.98	1000
3	4.00	6.75	7.98	1000
4	6.00	8.75	9.98	1000
5	8.00	10.75	11.98	1000
6	10.00	12.75	13.98	1000
7	12.00	14.75	15.98	500
8	14.00	16.75	17.98	500
9	16.00	18.75	19.98	500
10	18.00	20.75	21.98	500
11	20.00	22.75	23.98	500
12	22.00	24.75	25.98	250
13	24.00	26.75	27.98	250
14	26.00	28.75	29.98	250
15	28.00	30.75	31.98	250
16	30.00	32.75	33.98	250

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X, ±  
.X ± 0.25  
.XX ± 0.15  
.XXX ± 0.08  
ANG ±

照片框

ORDER INFORMATION

YH20-RK-xx-LF

SERIES | | LEADFREE  
02~16WAY  
KINK  
DIP 90°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: