

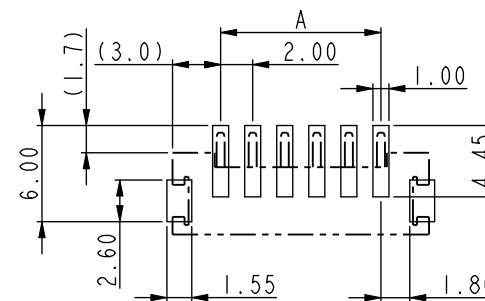
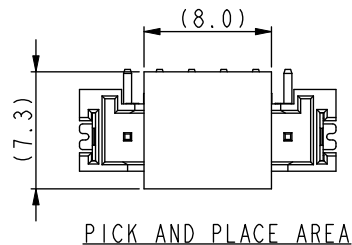
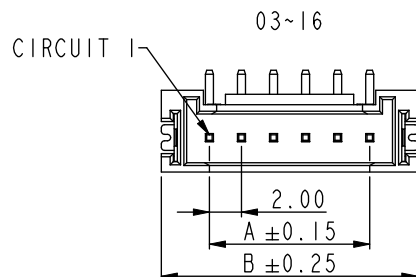




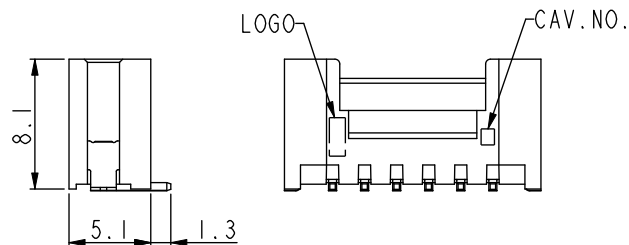




TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW



Mating Condition (REF.)

PIN	DIM. (mm)	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

NOTES

1. MATERIAL

INSULATION: NYLON 9T, UL94V-0(HALOGEN FREE); COLOR: SEE NOTE 4

COVER: NYLON 9T, UL94V-0(HALOGEN FREE); COLOR: BLACK

CONTACT: COPPER ALLOY, 0.50mm SQUARE PIN

SOLDER TAB: COPPER ALLOY, $t=0.20\text{mm}$ / MATTE-TIN PLATED OVER NICKEL

2. CONTACT FINISH: (1) MATTE TIN PLATED OVER NICKEL

(2) *u"min. GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, OVER NICKEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

YH20-VC-xx-LF
SERIES LEADFREE
02~16WAY
CAP
180°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 2.00 mm, VERTICAL, SMT TYPE, ASSEMBLY