
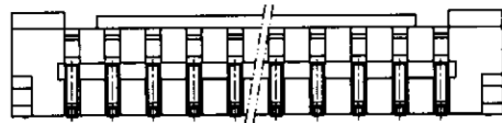



Dimensional & Ordering Information:

Circuits	Dimensions			Pcs/Reel
	A	B	C	
2	8.00	4.75	2.00	500
3	10.00	6.75	4.00	500
4	12.00	8.75	6.00	500
5	14.00	10.75	8.00	500
6	16.00	12.75	10.00	500
7	18.00	14.75	12.00	500
8	20.00	16.75	14.00	500
9	22.00	18.75	16.00	500
10	24.00	20.75	18.00	500
11	26.00	22.75	20.00	500
12	28.00	24.75	22.00	500
13	30.00	26.75	24.00	500
14	32.00	28.75	26.00	500
15	34.00	30.75	28.00	500

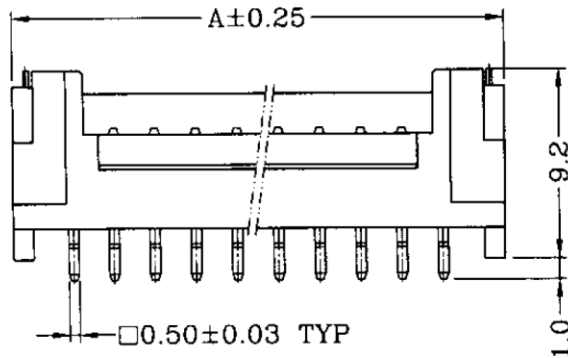

Material: \*Insulator: Thermal Plasticity Resin UL 94V-0 (Milky Yellow)  
 \*Contact Post: Square Pin, Brass, Matte Tin plated  
 \*Solder Tab: 0.30mm<sup>t</sup>, Brass, Matte Tin Plated

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

照片框

ORDER INFORMATION

YH20-W-xx-LF  
 SERIES | LEADFREE  
 02~15 WAY  
 90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: