
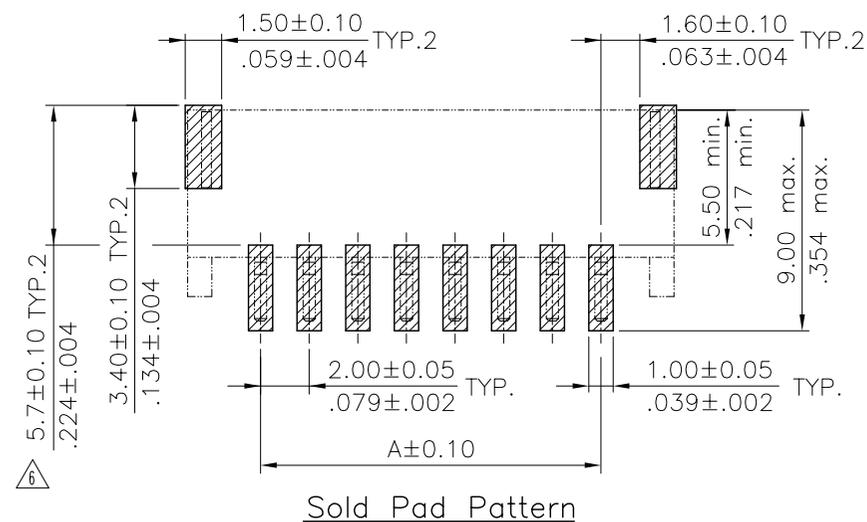
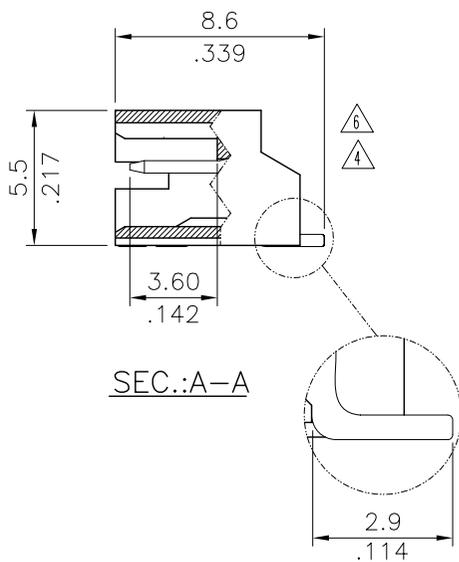
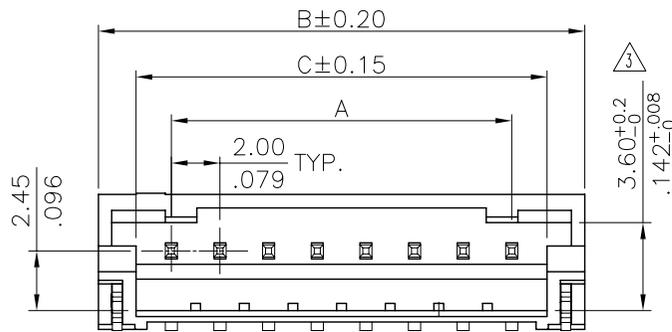


Material:  
 \* Insulation: Nylon 6T UL 94V-0, Color Nature  
 \* Contact: Brass  
 \* TAB: Brass  
 Plating:  
 \* TAB: Matte Tin plated over Nickel

YH22-WXR-xx-LF  
 LEADFREE  
 RoHS Compliant

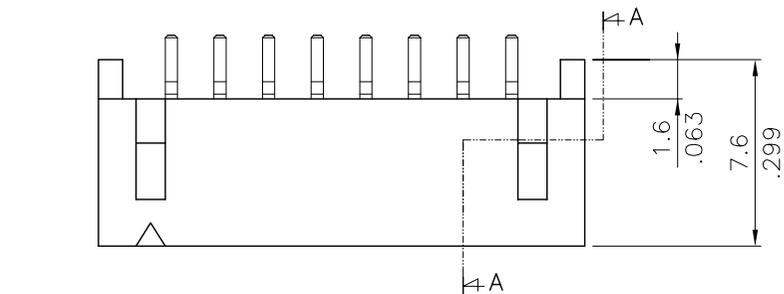


A = 2.00 x No. of Spaces  
 B = A + 6.0  
 C = A + 3.0  
 \* Available in 2 through 16 circuits

**MORETHANALL**  
 CONNECTORS  
 ASSEMBLIES

煜倫股份有限公司



PART NO. YH22-WXR-xx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:			
DWG NO. YH22-WXR-xx		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							

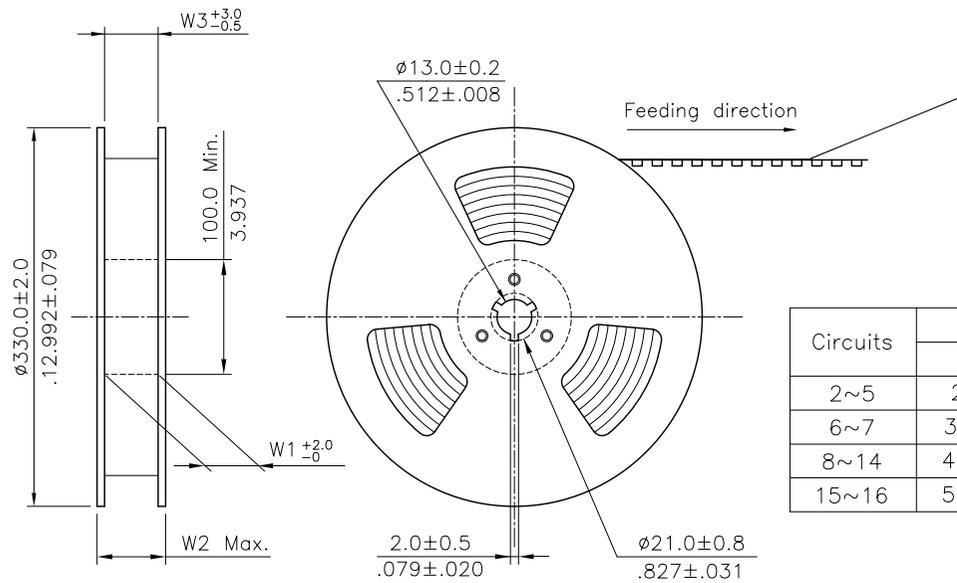

NOTE :

- \* Reel Material : HIPS
- \* Carrier Material : Transparent Anti-static Polysyrene.
- \* Cover Tape Material : Polyester
- \* Cover Tape Peel Strength : 0.1N – 1.3N
- \* Carrier camber is within 1mm in 100mm
- \* All dimensions meet EIA-481-2 requirements.
- \* Quantity : 700 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
2~5	24.0(.945)	-	24.5(.965)	30.5(1.200)	24.5(.965)	9
6~7	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
8~14	44.0(1.732)	40.40(1.596)	44.4(1.748)	50.4(1.984)	44.4(1.748)	5
15~16	56.0(2.205)	52.40(2.062)	56.5(2.224)	62.5(2.460)	56.5(2.224)	3

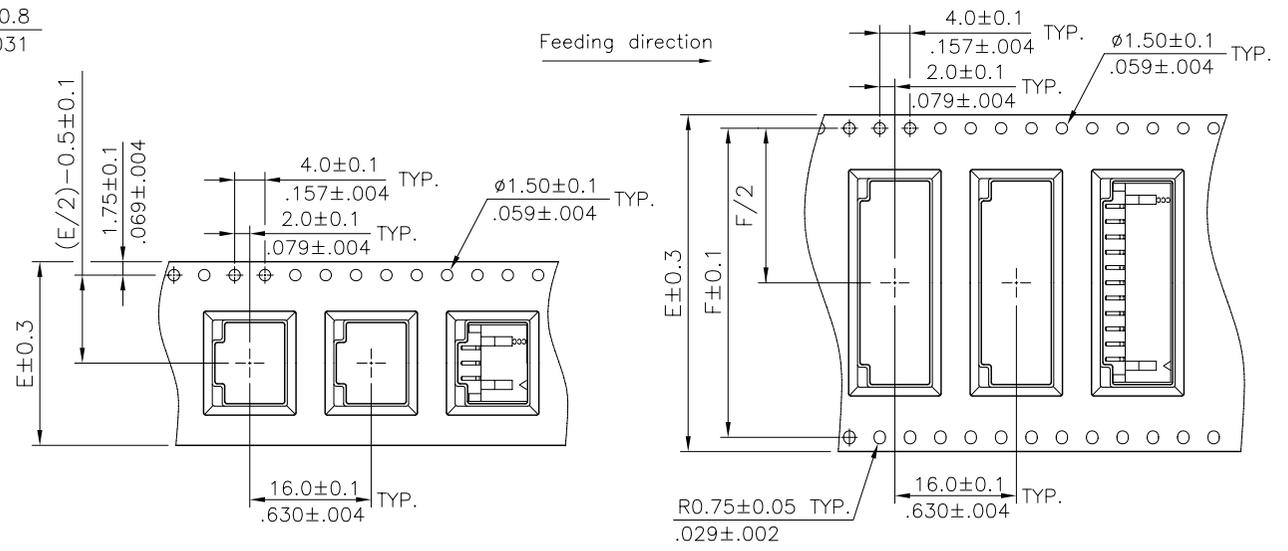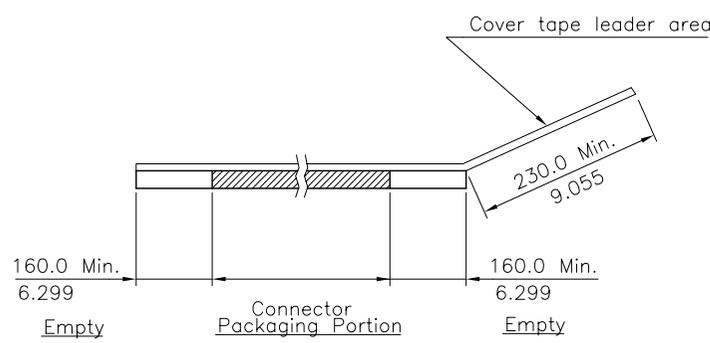

WIDTH : 24 mm Carrier

WIDTH : 32,44,56 mm Carrier

	PART NO. YH22-WXR-xx		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIPTION:				
	DWG NO. YH22-WXR-xx								DRAWING BY
焯倫股份有限公司	FILE NO.		PROJECTION	AREA	REVISIONS	HK	DATE		
	UNIT / mm	SCALE 1:1							