

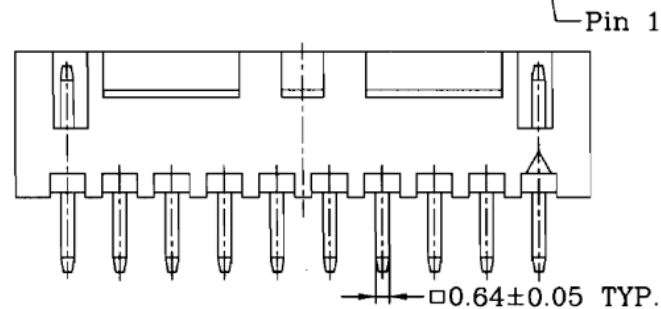


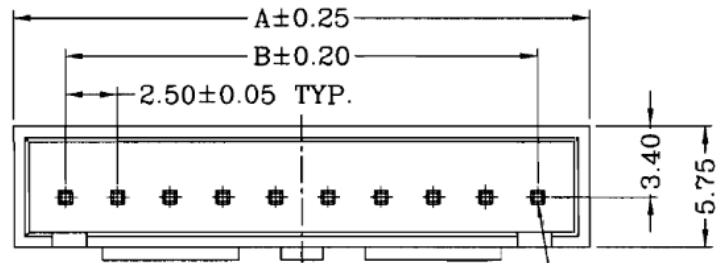

6P~15P

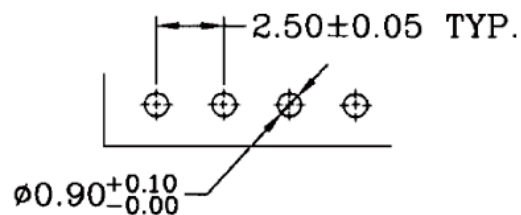


P.C.B LAYOUT

Material: *Insulator: Nylon 66 UL 94V-0 (White)

*Contact: Brass, Tin plated.

Note: RoHS and Halogen Free Compliance.

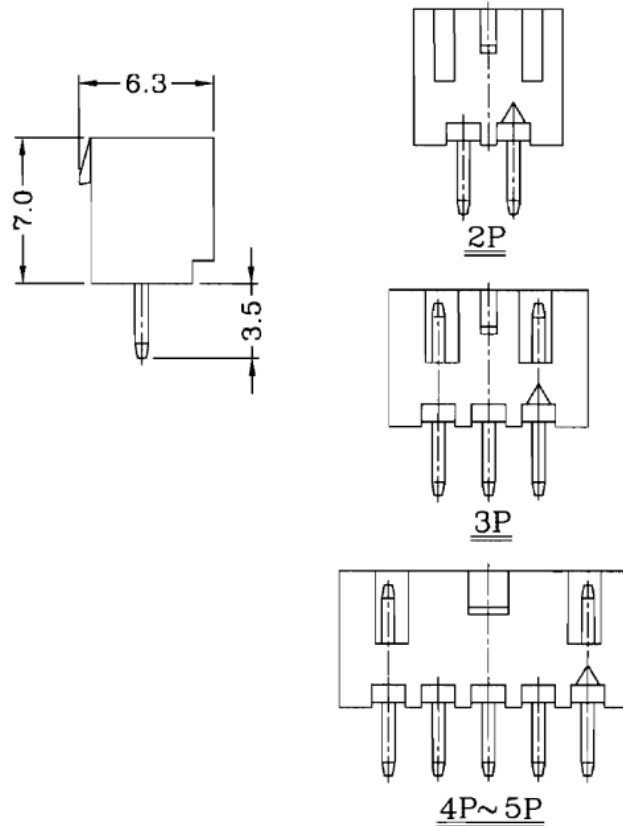

Dimensional & Ordering Information:

Circuits	Dimension mm		Qty/Bag
	A	B	
2	7.48	—	1000
3	9.98	5.00	1000
4	12.48	7.50	1000
5	14.98	10.00	1000
6	17.48	12.50	1000
7	19.98	15.00	500
8	22.48	17.50	500
9	24.98	20.00	500
10	27.48	22.50	500
11	29.98	25.00	500
12	32.48	27.50	250
13	34.98	30.00	250
14	37.48	32.50	250
15	39.98	35.00	250

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

YH25-D-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 180°

DESCRIPTION: