

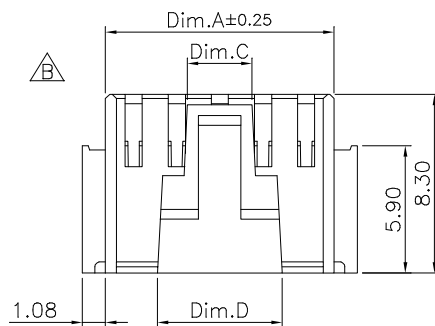
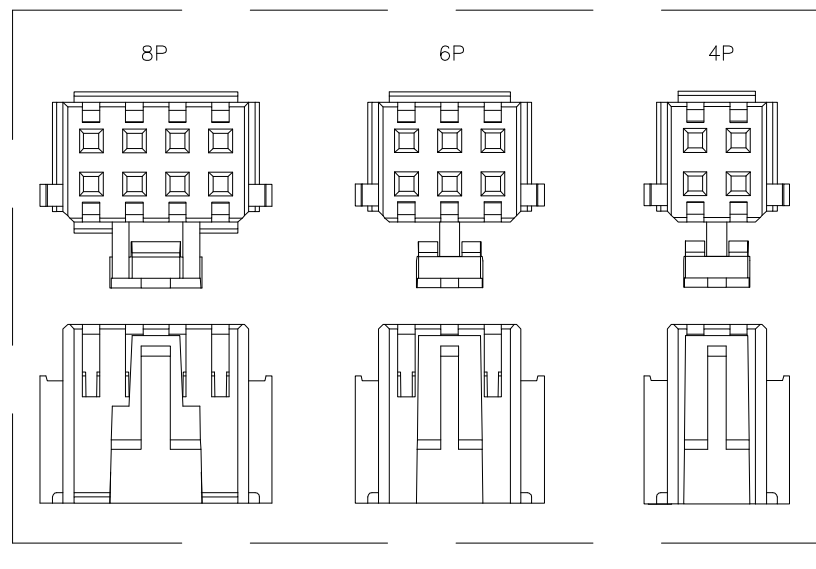


Specifications:
 Current Rating: 3.0A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 30m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -40°C ~ +105°C

Insulator Material: Nylon66(UL94V-0)
 Insulator Color: Natural

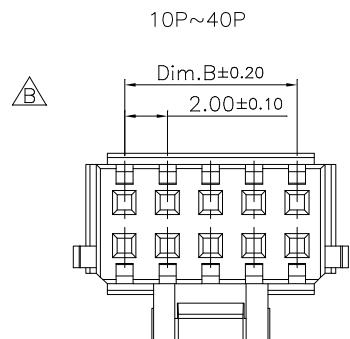

Circuits	Dim.A	Dim.B	Dim.C	Dim.D
4	4.60	2.00		3.10
6	6.60	4.00		
8	8.60	6.00		
10	10.60	8.00	3.00	5.80
12	12.60	10.00	5.00	7.80
14	14.60	12.00	7.00	9.80
16	16.60	14.00	9.00	11.80
18	18.60	16.00	11.00	13.80
20	20.60	18.00	13.00	15.80
22	22.60	20.00		
24	24.60	22.00		
26	26.60	24.00		
28	28.60	26.00		
30	30.60	28.00		
32	32.60	30.00		
34	34.60	32.00		
36	36.60	34.00		
38	38.60	36.00		
40	40.60	38.00		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

YHD20-H-xx-LF

SERIES

LEADFREE

04~40 WAY

HOUSING

DESCRIPTION: 2.0mm Wire To Board Double Row W/Lock Housing