


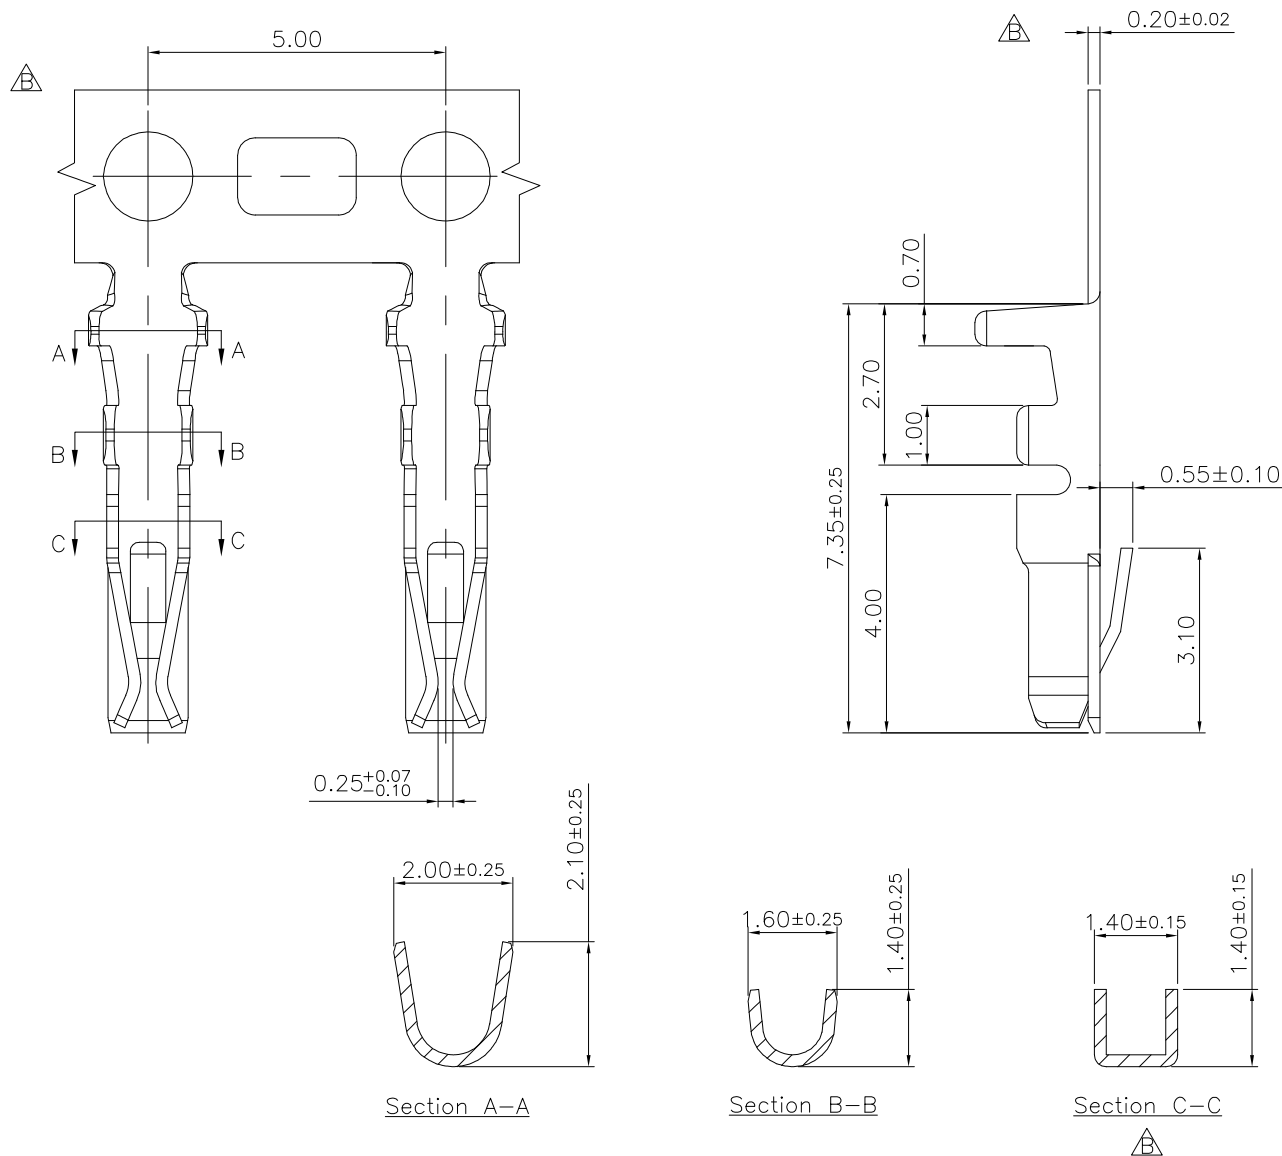

△ Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resisitance:20m ohm.Max
 Withstanding Voltage:800V AC/Minute
 Operating Temperature Range:-25°C~+85°C

Material:
 Contact:Phosphor Bronze
 Plated: Tin/Gold Plated △
 Application Wire: AWG#22~#28

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.25
 .XX ± 0.20
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YHD20-T-22-LF

SERIES

LEADFREE

22~28 AWG

TERMINAL

DESCRIPTION: 2.0mm Wire To Board Housing Terminal