


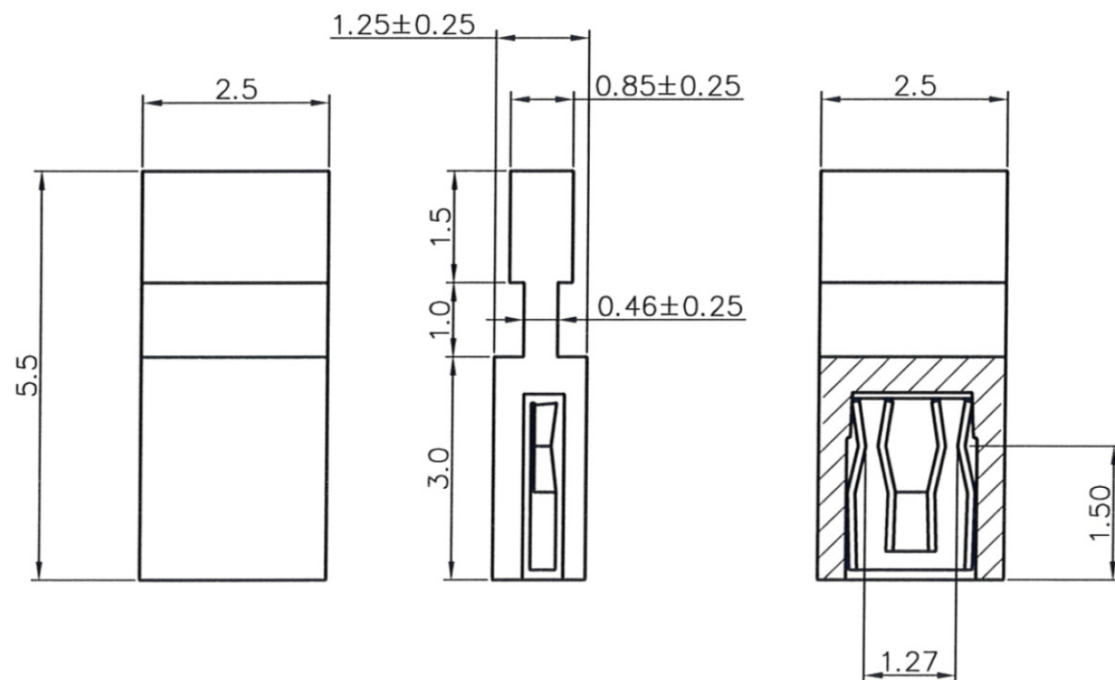

Specification

- 1.Current Rating: 1A AC/DC
- 2.Voltage Rating: 500V AC/DC
- 3.Contact Resistance: 30mΩ Maximum
- 4.Insulation Resistance: 1000MΩ Minimum At DC 500V
- 5.Dielectric Withstanding Voltage: AC 650Volts RMS at sea level
- 6.Operating Temperature: -40°C~+105°C

Material:

- 1.Insulation: Nylon 66+30%GF UL94V-0
- 2.Contact: Phosphor Bronze t=0.2

Finish:

- 1.Insulation: Black
- 2.Contact: Gold Flash

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

YJ-H-03-LF
SERIES | LEADFREE
HIGH 3mm
HANDLE

DESCRIPTION: Mini Jumper 1.27mm 2Pin H=5.5mm Black Close 鍍金袋裝