


MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	19	27

- NOTE:
- 1. MAXIMUM ELECTRICAL RATING: 105 °C 600 VOLTS
 - 2. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²
- INSULATED COLOR: BLUE

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.50	d1 ±0.20
16-14 AWG 1.5-2.5 mm ²	YT-N32S-14	3.2	5.0	6.3	22.0	11.0	4.5	2.3
	YT-N32-14	3.2	5.8	6.3	22.0			
	YT-N37S-14	3.7	5.8	6.3	22.0			
	YT-N37M-14	3.7	6.4	6.3	22.0			
	YT-N37L-14	3.7	7.2	6.5	22.2			
	YT-N43S-14	4.3	6.4	6.3	22.0			
	YT-N43M-14	4.3	7.2	6.5	22.2			
	YT-N43L-14	4.3	8.5	7.3	23.0			
	YT-N53S-14	5.3	8.5	7.3	23.0			
	YT-N53L-14	5.3	9.5	7.3	23.0			
	YT-N65S-14	6.5	9.5	7.3	23.0			
	YT-N65L-14	6.5	12.0	11.0	28.2			
	YT-N84-14	8.4	12.0	11.0	28.2			

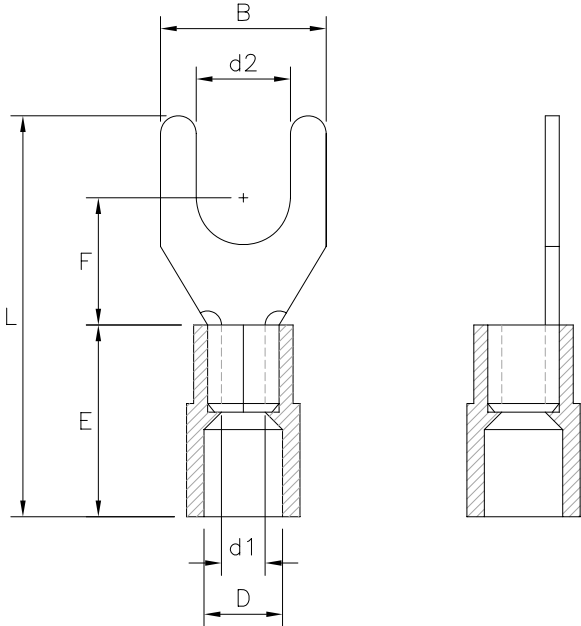

MATERIAL
INSULATION: NYLON
MATERIAL: COPPER
TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

YT-Nxxy-14-LF
SERIES 14~16AWG
LEADFREE
BLANK: STANDARD
S.M.L/ B WIDTH
NYLON 32: d2 3.2mm
37: d2 3.7mm

DESCRIPTION: