

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	19


NOTE:

1. MAXIMUM ELECTRICAL RATING: 105 °C 600 VOLTS

2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²

INSULATED COLOR: RED

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.50	d1 ±0.20
22-16 AWG 0.5-1.5 mm ²	YT-N32S-16	3.2	5.0	6.3	22.0	11.0	4.1	1.7
	YT-N32-16	3.2	5.8	6.3	22.0			
	YT-N37S-16	3.7	5.8	6.3	22.0			
	YT-N37M-16	3.7	6.4	6.3	21.6			
	YT-N37L-16	3.7	7.2	6.3	22.0			
	YT-N43S-16	4.3	6.4	6.3	21.6			
	YT-N43M-16	4.3	7.2	6.3	22.0			
	YT-N43L-16	4.3	8.0	7.0	22.0			
	YT-N53S-16	5.3	8.0	7.0	22.0			
	YT-N53L-16	5.3	9.5	7.0	22.0			
	YT-N65S-16	6.5	9.5	7.0	22.0			
	YT-N65L-16	6.5	12.0	11.0	28.2			
	YT-N84-16	8.4	12.0	11.0	28.2			

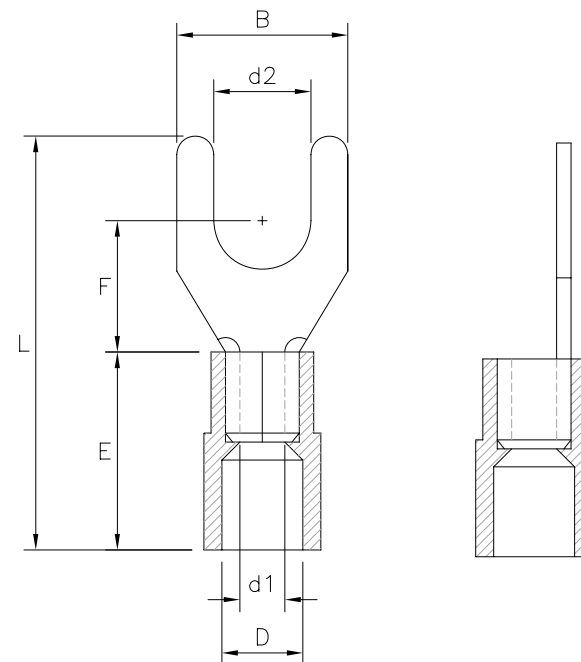

MATERIAL

INSULATION: NYLON

MATERIAL: COPPER

TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

YT-Nxxy-16-LF
SERIES 16-22AWG
LEADFREE
BLANK: STANDARD
S.M.L/ B WIDTH
NYLON 32: d2 3.2mm
37: d2 3.7mm

DESCRIPTION: