

MATERIAL

INSULATION: VINYL

MATERIAL: COPPER

TIN PLATING

MAXIMUM ELECTRIC CURRENT

A. W. G	16	14
MAX AMP	18	30

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS


2. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²

INSULATED COLOR: BLUE

3. MATERIAL THICKNESS: t

TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
16-14 AWG 1.5-2.5 mm ²	YT-V37S-14	3.7	5.8	6.3	21.0	10.0	4.5	2.3	0.8

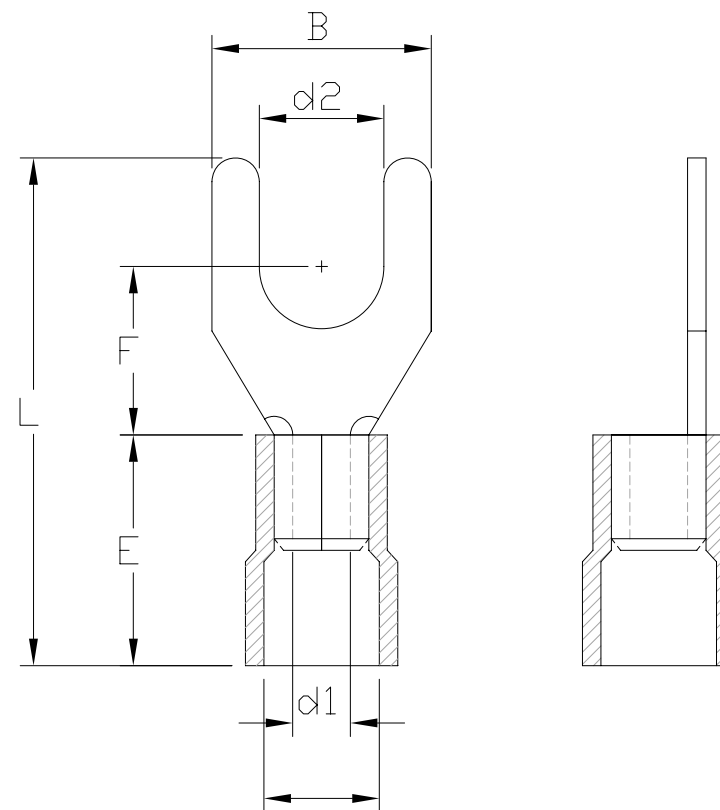

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

YT-V37S-14-LF
SERIES | LEADFREE
14~16AWG
B: 5.8mm WIDTH
d2: 3.7mm
PVC

DESCRIPTION: