

MATERIAL

INSULATION: VINYL

MATERIAL: COPPER

TIN PLATING


MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16
MAX AMP	9	12	17	18

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS
2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR: RED
3. MATERIAL THICKNESS: t
TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	d2 ±0.20	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	YT-V37S-16	3.7	5.8	6.3	21.0	10.0	4.1	1.7	0.75

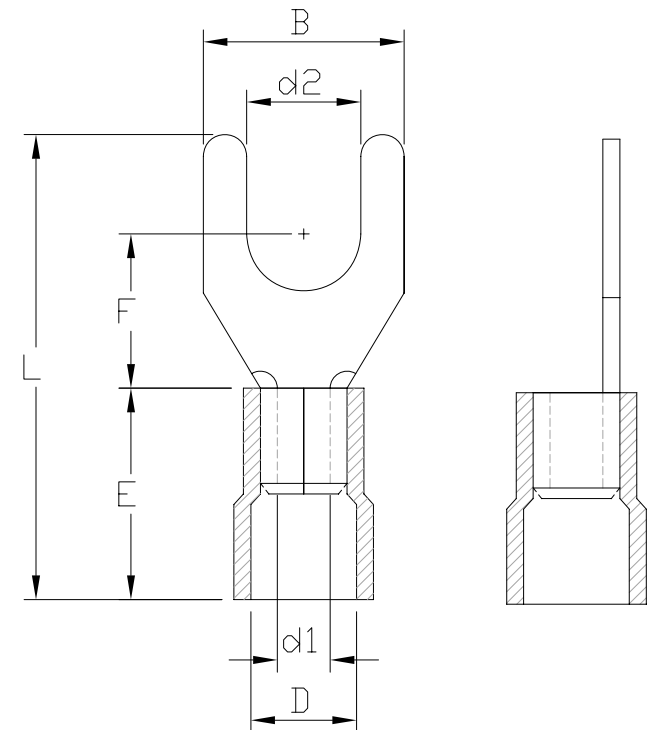

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

YT-V37S-16-LF
SERIES | LEADFREE
16~22AWG
B: 5.8mm WIDTH
d2: 3.7mm
PVC

DESCRIPTION: