

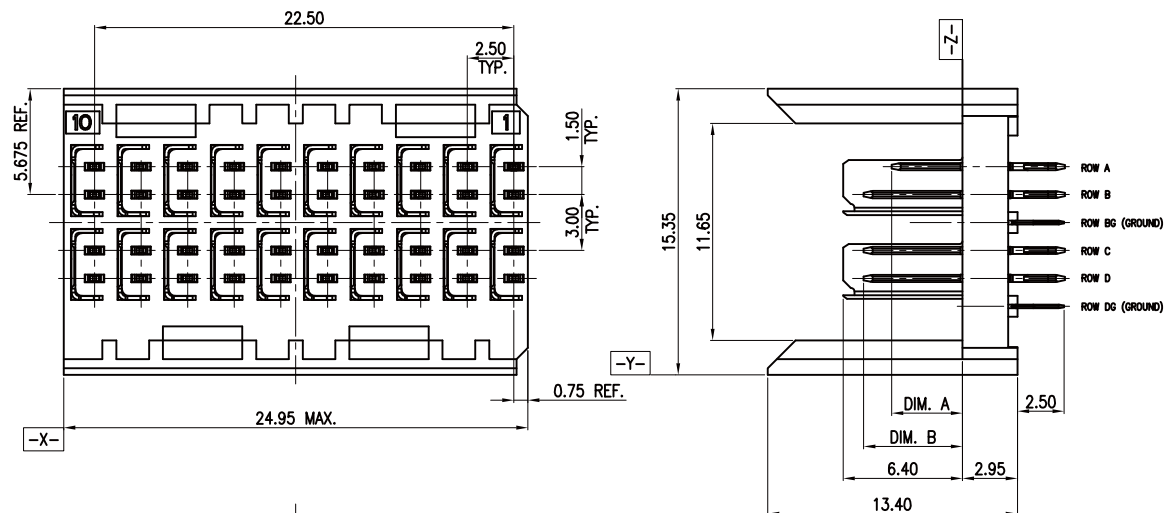


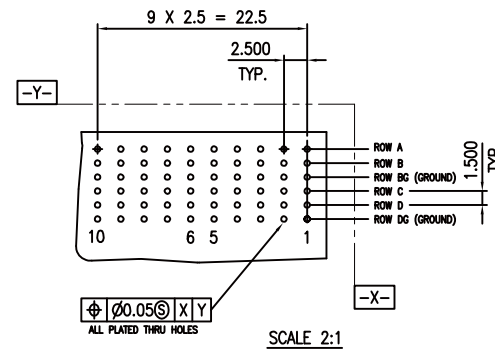

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL TOLERANCES FOLLOW DRAWING COMMON STANDARD.
2. UNLESS OTHERWISE SPECIFIED, ALL RADIUS ARE 0.2 MM.
3. MATERIAL :
 INSULATORL.C.P.+30% GLASS REINFORCED
 CONTACTPHOSPHOR BRONZE C5191R-H
 SHIELDEDPHOSPHOR BRONZE C5191R-H

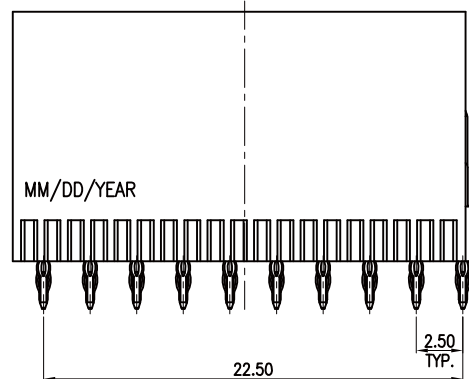


SCALE 2:1

PIN ASSIGNMENT

B	B	B	B	B	B	B	B	B	B	A
B	B	B	B	B	B	B	B	B	B	B
G	G	G	G	G	G	G	G	G	G	G
B	B	B	B	B	B	B	B	B	B	B
B	B	B	B	B	B	B	B	B	B	B
G	G	G	G	G	G	G	G	G	G	G

A=3.80mm
B=5.30mm
G=GROUND

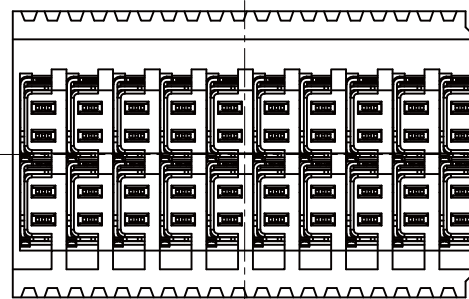

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZD-PP-2X10-LF
 SERIES | LEADFREE
 20 WAY
 PRESS FIT
 MALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: ZD MALE CONNECTOR ASSEMBLY , 2 PAIR 2.5mm TAIL