
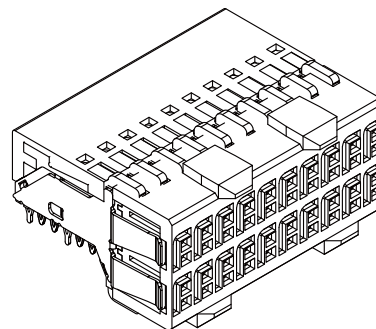


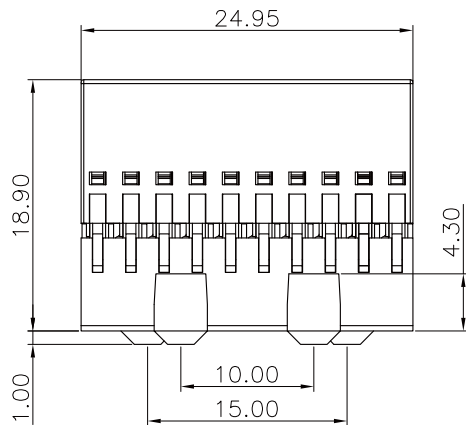

Material:

Housing: High Temperature Plastic UL94V-0.

Contacts: Copper Alloy

Ground Contact Sheet: Copper Alloy

Electrical Characteristics:

Current Rating: 0.4 AMP.

Dielectric Withstanding Voltage: AC 750V For 1 minute.




Insulator Resistance: 1000MΩ min. at DC 100V.

Contact Resistance: 50mΩ max. at DC 100mA. (Signal)

15mΩ max. at DC 100mA. (Ground)

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant.**

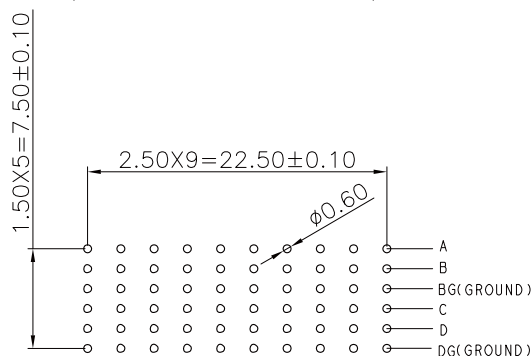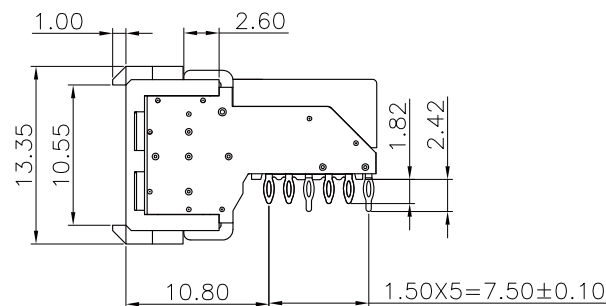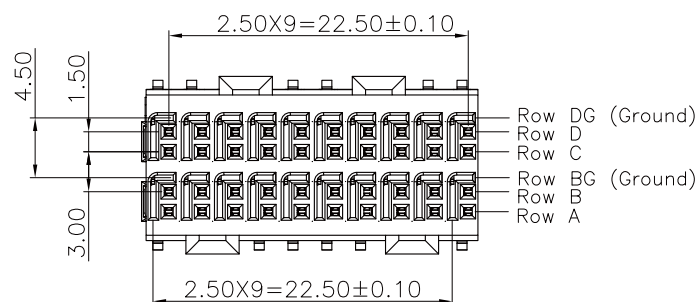

P.C.Board Layout
(Tolerance:±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZD-SQ-2X10-LF
SERIES LEADFREE
20 WAY
90° PRESS FIT
FEMALE

DESCRIPTION: