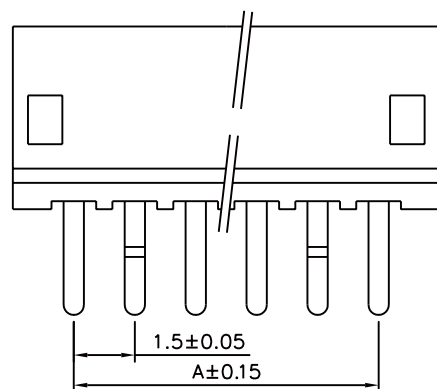

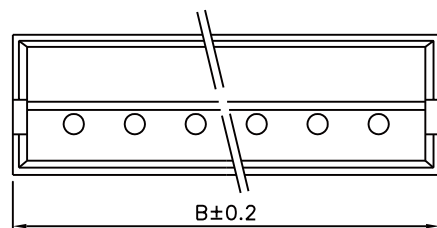


SPECIFICATION

CURRENT RATING: 1A AC/DC
 PITCH BETWEEN POLES: 1.5mm
 VOLTAGE RATING: 100V AC/DC
 CONTACT RESISTANCE: 20mohm (max)
 TEMPERATURE RANGE: -25°C TO +85°C
 INSULATION RESISTANCE: 500Mohm MIN
 WITHSTAND VOLTAGE: 500V AC/MINUTE
 APPLICATION P.C.B THICKNESS: 0.6~1.2mm
 APPLICATION P.C.B HOLD DIA: Ø0.7mm±0.05

FEATURES

AVAILABLE NUMBER OF CIRCUITS: 2 TO 13
 MATERIAL: NYLON 66 UL94-V0
 CONTACT: 0.50mm(0.02")ROUND PIN,BRASS: TIN PLATED

Circuits	Dim. A	Dim. B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

ZH-D-xx-LF
 SERIES | LEADFREE
 02~13WAY
 DIP 180°

DESCRIPTION: