


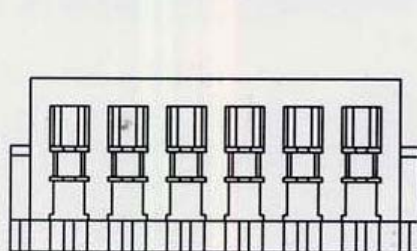


Housing



1. Material: Nylon 66 UL 94V0
2. Color: Green / White

NY66 UL94V0,White Color, Wire AWG 30
 NY66 UL94V0,Green Color, Wire AWG 28

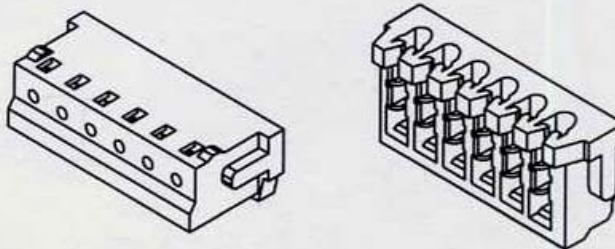

RECOMMENDED PCB LAYOUT

(PCB T=0.6~1.6mm)
 (PCB T=.024~.063in)

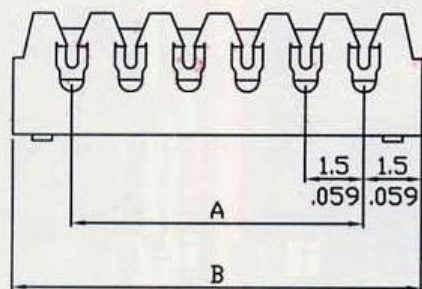

Circuits	Dim A	Dim B	Circuits	Dim A	Dim B
2	1.5(.059)	4.5(.177)	8	10.5(.413)	13.5(.531)
3	3.0(.118)	6.0(.236)	9	12.0(.472)	15.0(.591)
4	4.5(.177)	7.5(.295)	10	13.5(.531)	16.5(.650)
5	6.0(.236)	9.0(.354)	11	15.0(.591)	18.0(.709)
6	7.5(.295)	10.5(.413)	12	16.5(.650)	19.5(.768)
7	9.0(.354)	12.0(.472)	13	18.0(.709)	21.0(.827)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

ZH-H1xx-xx-LF
 SERIES | LEADFREE
 02~13WAY
 28.30 AWG
 HOUSING IDC

DESCRIPTION: