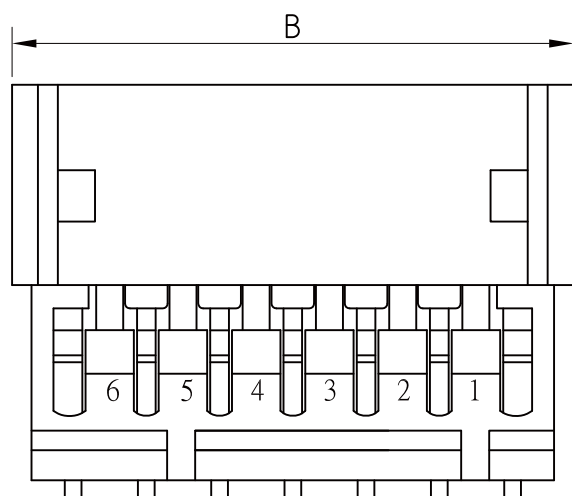
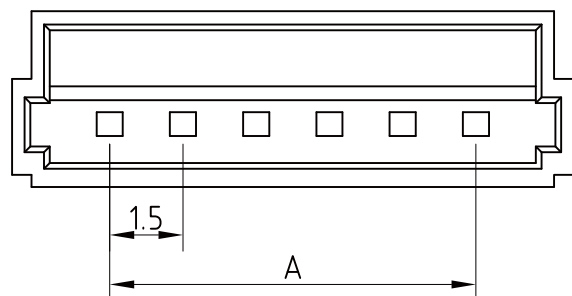


SPECIFICATION

PITCH BETWEEN POLES: 1.5mm

CURRENT RATING: 1A AC/DC

VOLTAGE RATING: 50V AC/DC

CONTACT RESISTANCE : 20mΩ(max.)

TEMPERATURE RANGE: -25°C TO +85°C

INSULATION RESISTANCE: 500MΩMIN.

WITHSTAND VOLTAGE: 500V AC/MINUTE

APPLICABLE WIRE: AWG#28 TO #32

FEATURES

AVAILABLE NUMBER OF CIRCUITS: 2 TO 13

MATERIAL: NYLON 66 UL 94V-0

ACCEPTS: ZH-M-28 CRIMP TERMINAL

MATES WITH ZH-H-xx SERIES HOUSING

Dimensional and Order Information

Poles	Part No	DIM:(mm)	
		A	B
2	ZH-P-02	1.50	5.50
3	ZH-P-03	3.00	7.00
4	ZH-P-04	4.50	8.50
5	ZH-P-05	6.00	10.00
6	ZH-P-06	7.50	11.50
7	ZH-P-07	9.00	13.00
8	ZH-P-08	10.50	14.50
9	ZH-P-09	12.00	16.00
10	ZH-P-10	13.50	17.50
11	ZH-P-11	15.00	19.00
12	ZH-P-12	16.50	20.50
13	ZH-P-13	18.00	22.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZH-P-xx-LF
SERIES | LEADFREE
02~13 WAY
MALE HOUSING

DESCRIPTION: 1.5mm PITCH WIRE TO WIRE FEMALE HOUSING