
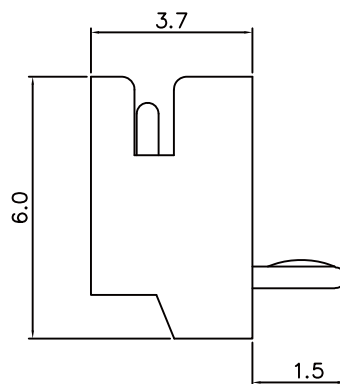
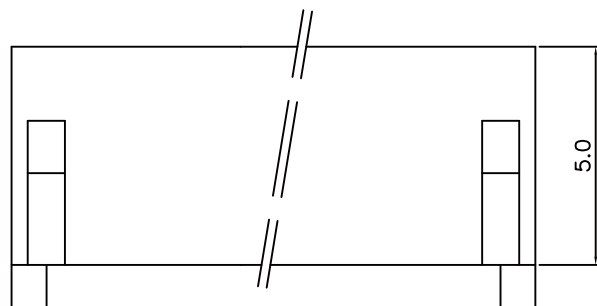



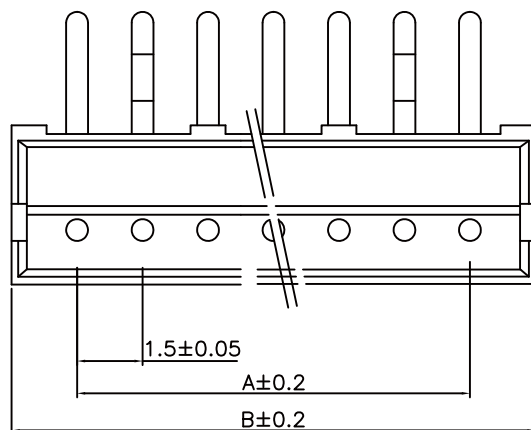

SPECIFICATION

CURRENT RATING: 1A AC/DC

PITCH BETWEEN POLES: 1.5mm

VOLTAGE RATING: 100V AC/DC

CONTACT RESISTANCE: 20mohm (max)

TEMPERATURE RANGE: -25°C TO +85°C

INSULATION RESISTANCE: 500Mohm MIN

WITHSTAND VOLTAGE: 500V AC/MINUTE

APPLICATION P.C.B THICKNESS: 0.6~1.2mm

APPLICATION P.C.B HOLE DIA: Ø0.7mm±0.05

FEATURES

AVAILABLE NUMBER OF CIRCUITS: 2 TO 13

MATERIAL: NYLON 66 UL94-V0

CONTACT: 0.50mm(0.02")ROUND PIN, BRASS: TIN PLATED

Circuits	Dim. A	Dim. B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZH-RD15-xx-LF
SERIES | LEADFREE
DIP 1.5mm
DIP 90°

DESCRIPTION: