

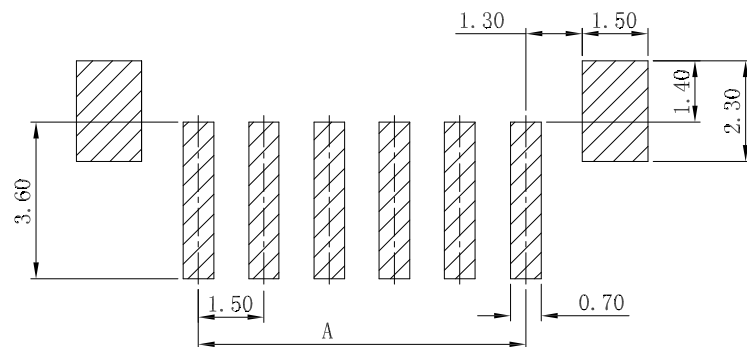
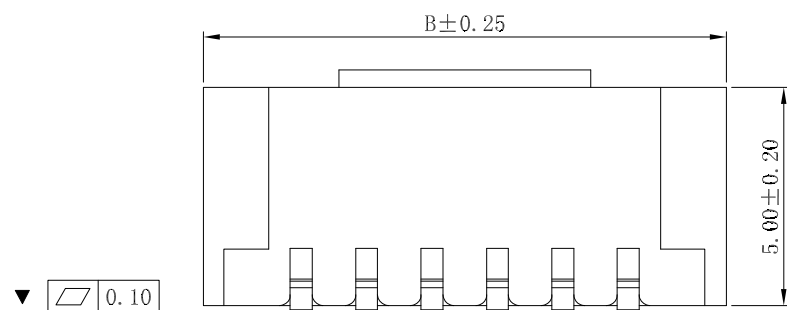


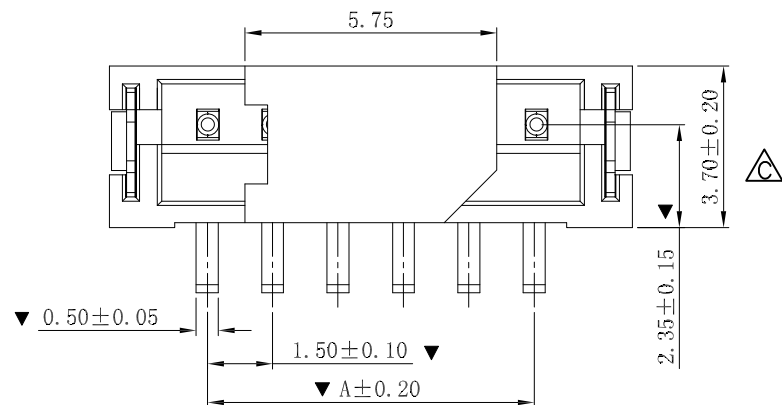

P. C. B LAYOUT

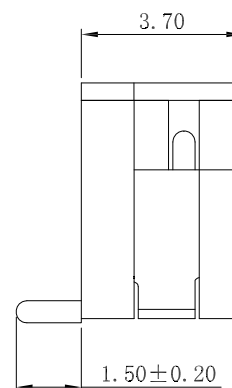

■ SPECIFICATIONS

- Voltage Rating: 50V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation Resistance: 100M Ω min
- Temperature range: -40° C~+105° C
- Contact resistance: 40m Ω max

■ WAFER

- Poles : 02-15P
- Housing Material: PA6T UL94V-0
- Pin Material: Brass /Matte Tin-Plated
- Solder Tab Material: Brass /Matte Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension(mm)	
	A	B
02	1.50	6.00
03	3.00	7.50
04	4.50	9.00
05	6.00	10.50
06	7.50	12.00
07	9.00	13.50
08	10.50	15.00
09	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.15
.XX $\pm$ 0.05
.XXX $\pm$
ANG $\pm$ 3°

照片框

ORDER INFORMATION

ZH-VC-xx-LF
SERIES LEADFREE
02~15 WAY
MYLAR
180°SMT

DESCRIPTION: 1.5mm SMT 180° WAFER CAP+T/R