
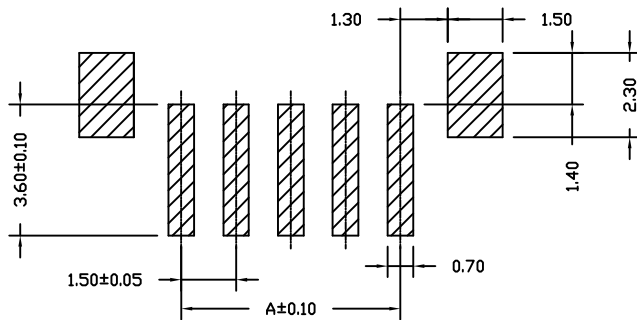

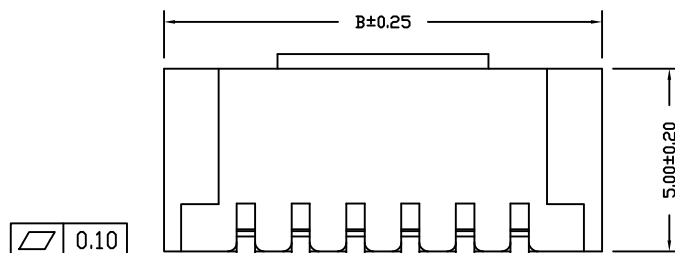


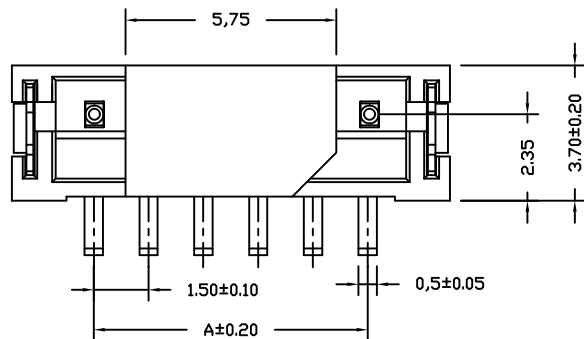

P.C.B LAYOUT

SPECIFICATIONS

- Voltage Rating: 50V AC, DC
- Current Rating: 1.0A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation Resistance: 100M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 40m Ω max

WAFER

- Poles : 02-15P
- Housing Material: Nylon 6T UL94V-0
- Pin Material: Brass /Tin-plated
- Solder Tab Material: Brass /Tin-plated

Contacts	Dimension(mm)	
	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

照片框


ORDER INFORMATION

ZH-VCR-xx-LF
SERIES REEL MYLAR 180°SMT
LEADFREE 02~15 WAY


DESCRIPTION: 1.5mm SMT 180° WAFER CAP+T/R

Note:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-3 requirements.
- 6.Material:White Conductive Polystyrene Alloy
100% recyclable.
- 7.Thickness:0.4 $\pm$ 0.05mm
- 8.Component load per 13" reel:1000pcs.
- 9.Reserve more than 15 pcs before and after

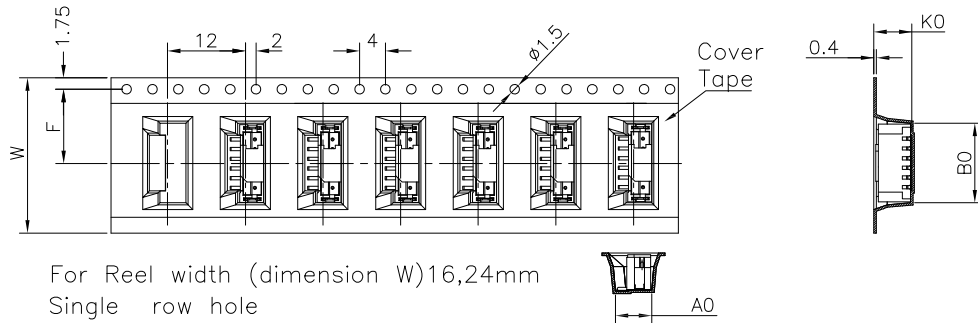


For Reel width (dimension W)16,24mm
Single row hole

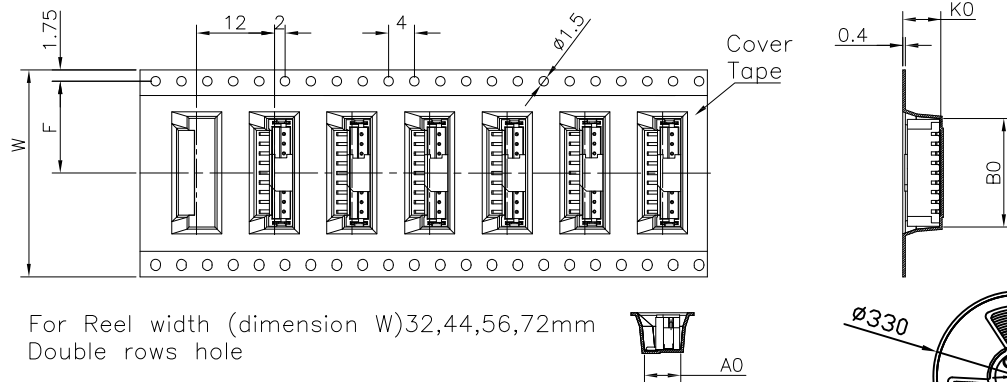

For Reel width (dimension W)32,44,56,72mm
Double rows hole

出料方向

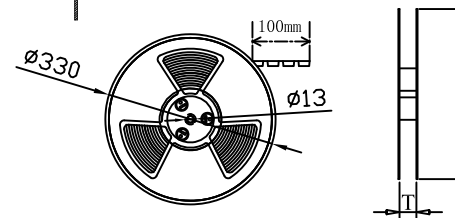

Pin No	W	F	A0	B0	K0
02	16	7.5	5.65	6.3	5.9
03	16	7.5	5.65	7.8	5.9
04	24	11.5	5.65	9.3	5.9
05	24	11.5	5.65	10.8	5.9
06	24	11.5	5.65	12.3	5.9
07	24	11.5	5.65	13.8	5.9
08	24	11.5	5.65	15.3	5.9
09	32	14.2	5.65	16.8	5.9
10	32	14.2	5.65	18.3	5.9
11	32	14.2	5.65	19.8	5.9
12	44	20.2	5.65	21.3	5.9
13	44	20.2	5.65	22.8	5.9

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

ZH-VCR-xx-LF
SERIES REEL MYLAR 180°SMT
LEADFREE 02~15 WAY

DESCRIPTION: 1.5mm SMT 180° WAFER CAP+T/R