


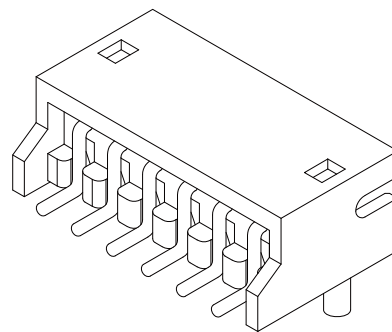

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



Contact Resistance: 20m Ω Max.

Insulation Resistance: 500M Ω Min.



Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 6T,UL94V-0

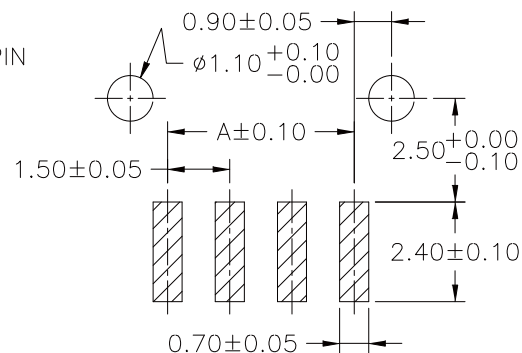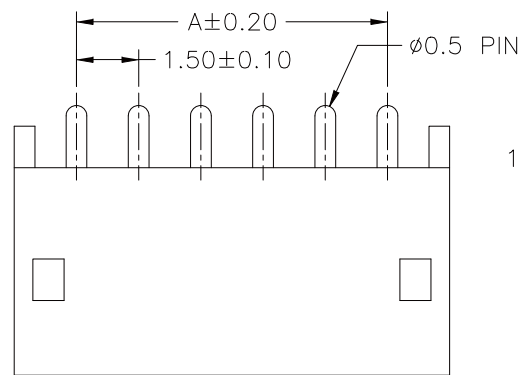

P.C.B LAYOUT

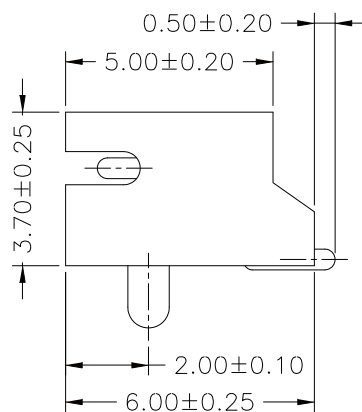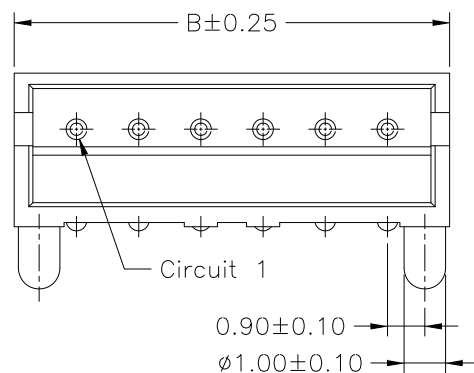

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
ZH-WP-02	1.50	4.50
ZH-WP-03	3.00	6.00
ZH-WP-04	4.50	7.50
ZH-WP-05	6.00	9.00
ZH-WP-06	7.50	10.50
ZH-WP-07	9.00	12.00
ZH-WP-08	10.50	13.50
ZH-WP-09	12.00	15.00
ZH-WP-10	13.50	16.50
ZH-WP-11	15.00	18.00
ZH-WP-12	16.50	19.50
ZH-WP-13	18.00	21.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

ZH-WP-xx-LF
SERIES LEADFREE
02~13 WAY
POST
90°SMT

DESCRIPTION: 1.50mm PITCH 90° WAFER-SMT TYPE