

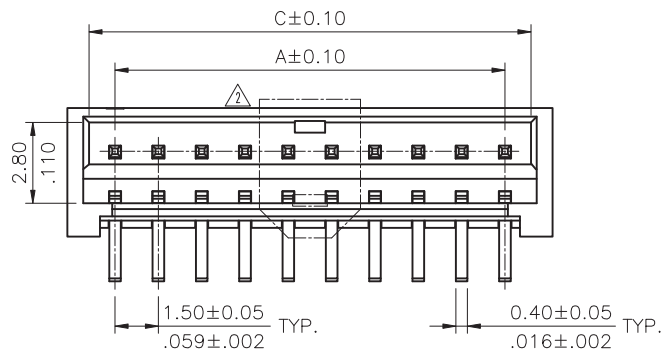
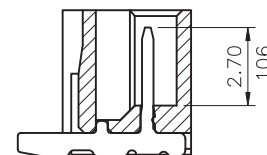
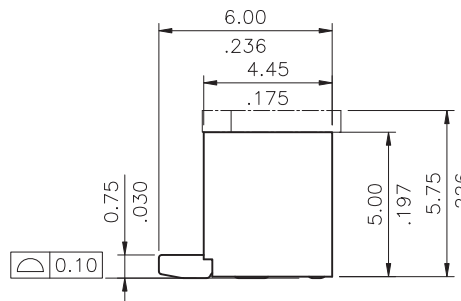


Material
Insulator: Halogen Free Plastic
UL 94V-0 Color Black
Contact: Copper alloy

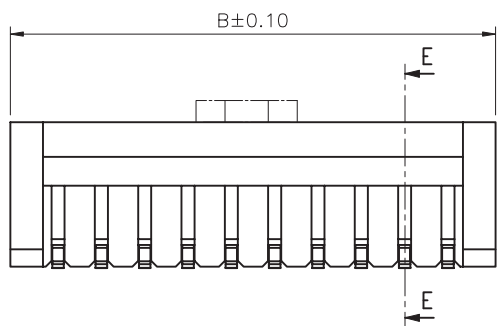

SEC.: E-E

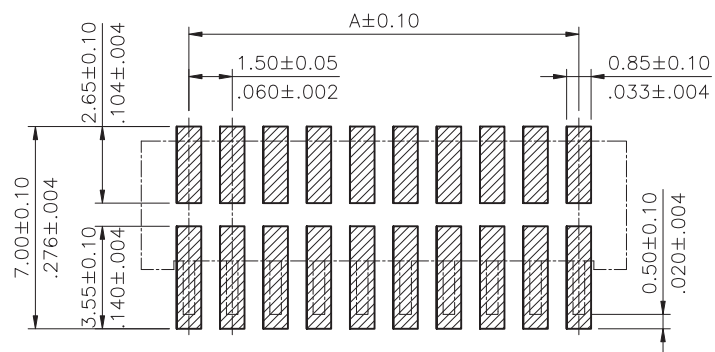

Recommended P.C. Board Layout

DIM. A = 1.50 x NO. OF SPACES

DIM. B = DIM. A + 3.3

DIM. C = DIM. A + 1.8

* AVAILABLE IN 2 THROUGH 20 CIRCUITS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±


PPOJECTION

照片框

ORDER INFORMATION

ZHQ-VCR-xx-LF
SERIES | | | LEADFREE
| | | 02~20WAY
| | | REEL
| | | CAP
| | | 180°SMT



DESCRIPTION:

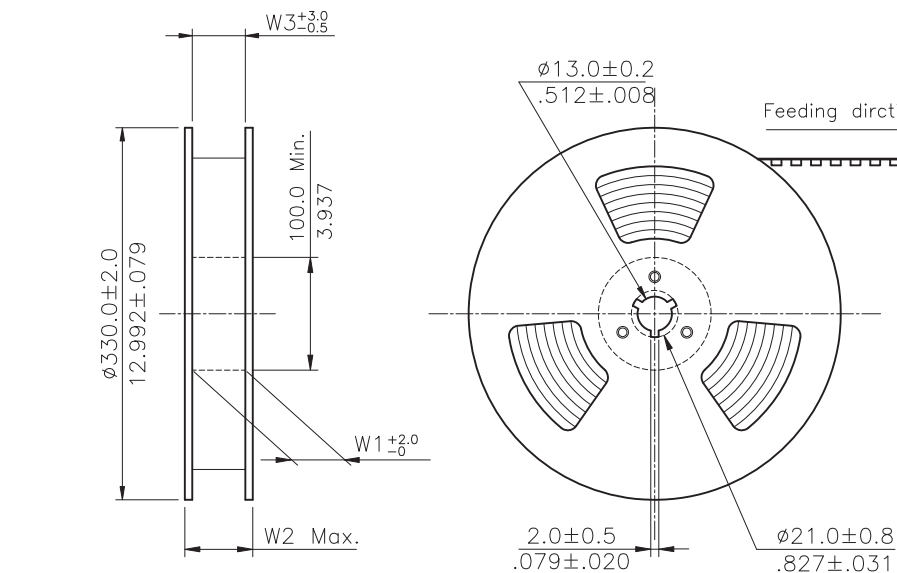


NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Black, Polystyrene alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 900 PCS/Reel

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2-4	16.0(.630)	-	16.5(.650)	22.5(.886)	16.5(.650)	11
5-8	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9
9-14	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
15-20	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5

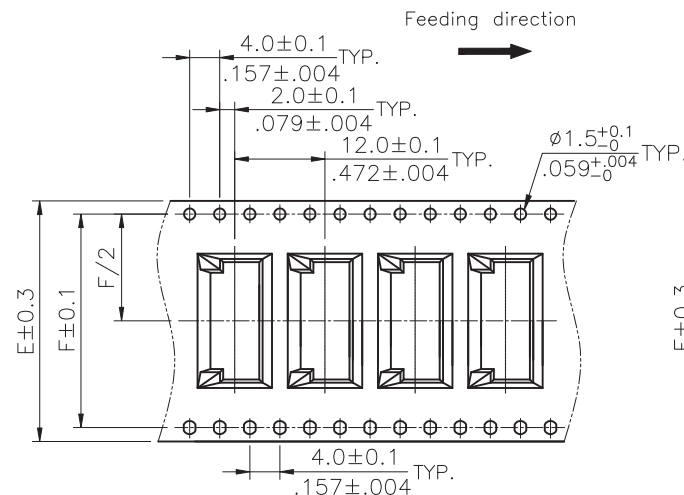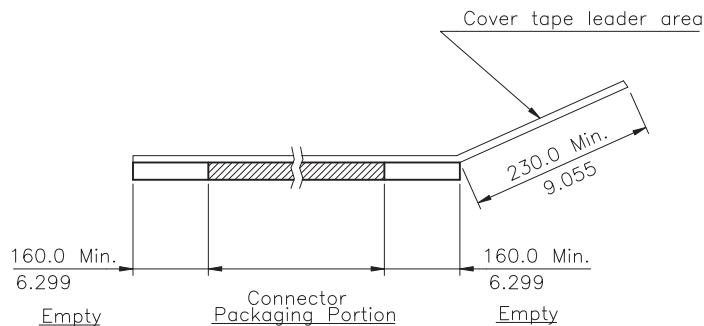

WIDTH : 32,44 mm Carrier

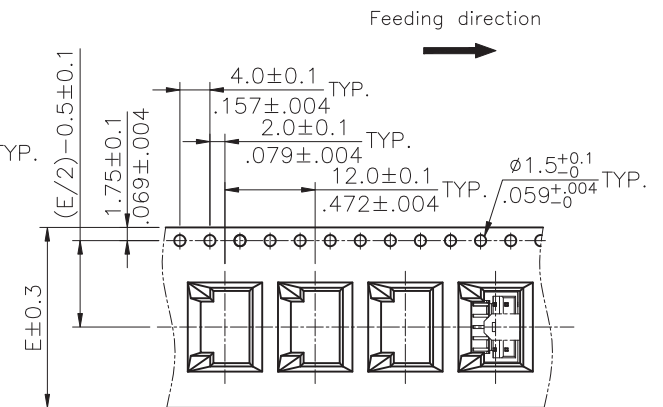

WIDTH : 16,24 mm Carrier

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

ZHQ-VCR-xx-LF
SERIES
LEADFREE
02-20WAY
REEL
CAP
180°SMT

DESCRIPTION: