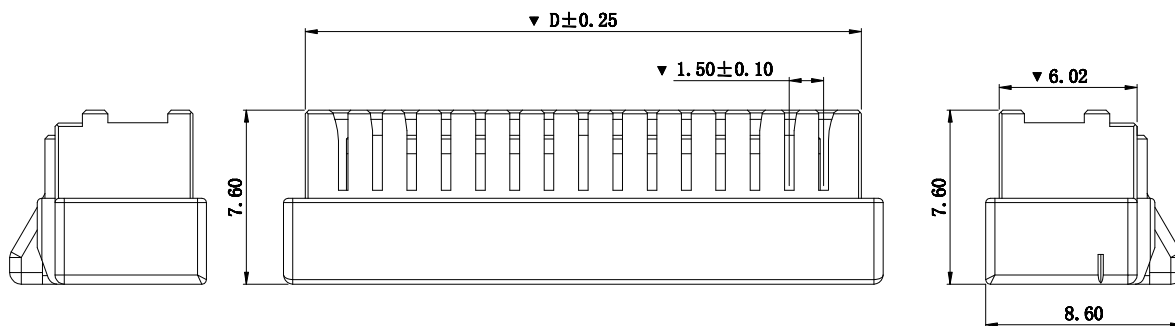
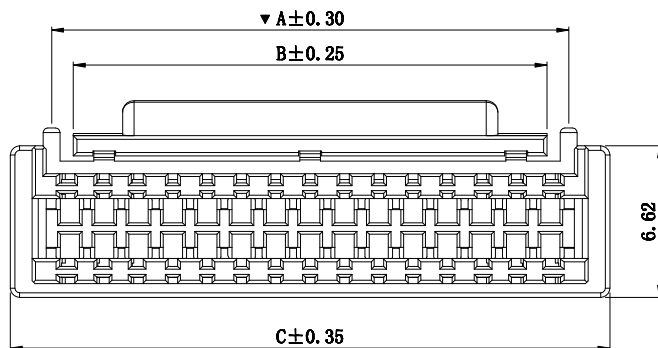


SPECIFICATIONS

Voltage rating: 100V AC, DC


Current rating: 2A, AC, DC

Withstanding Voltage: 500V AC/minute

Insulation resistance: 500M Ω min

Temperature range: -25° C ~ +85° C

Housing Material: PA66 UL94V-0

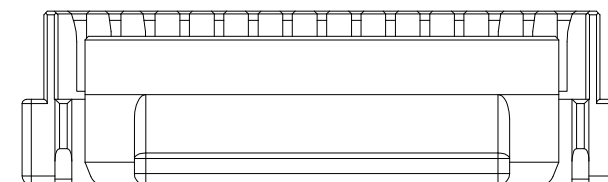

Contacts	Dimensions(mm)			
	Dim A	Dim B	Dim C	Dim D
2x05	7.50	6.00	11.20	9.30
2x06	9.00	7.50	12.70	10.80
2x07	10.50	9.00	14.20	12.30
2x08	12.00	10.50	15.70	13.80
2x09	13.50	12.00	17.20	15.30
2x10	15.00	13.50	18.70	16.80
2x13	19.50	17.50	23.20	21.30
2x15	22.50	20.50	26.20	24.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.20
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

ZPD-H-xx-LF
SERIES | LEADFREE
10~30 WAY
HOUSING

DESCRIPTION: ZPD1.5mm Male Housing