


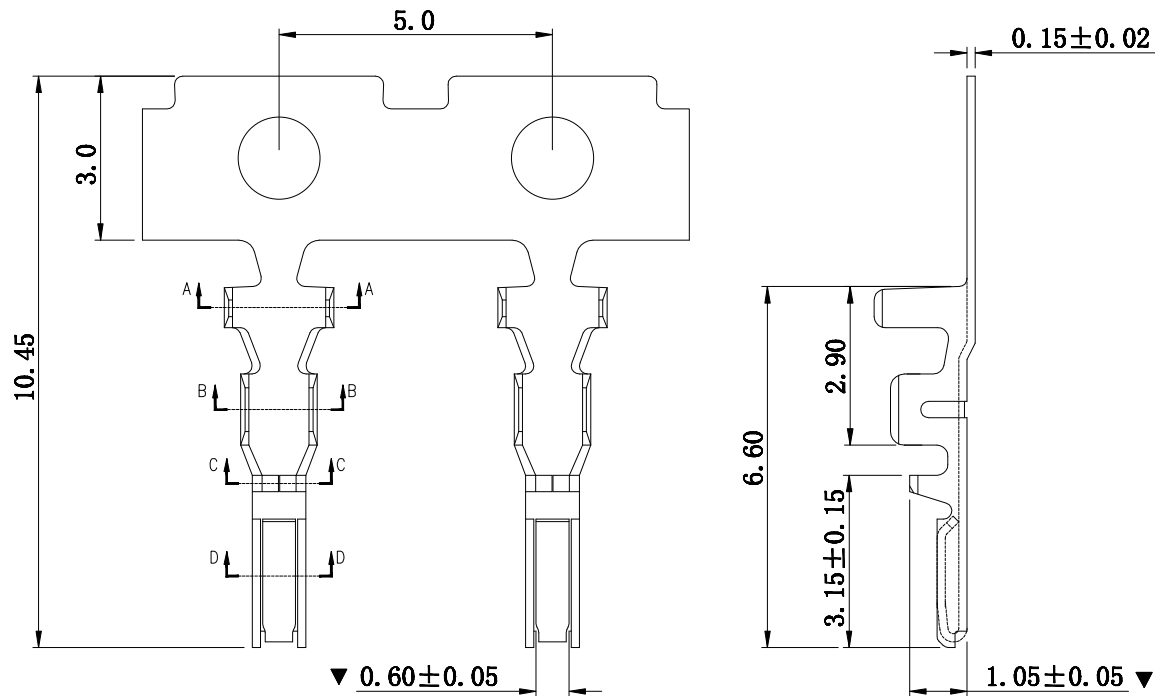

SPECIFICATIONS

Voltage rating: 100V AC, DC

Current rating: 2A, AC, DC

Withstanding Voltage: 500V AC/minute


Temperature range: -25° C ~ +85° C

Contact resistance: 20mΩ max


Applicable wire: AWG#24-#28

Material: Phosphor Bronze


Finish: Tin-Plated

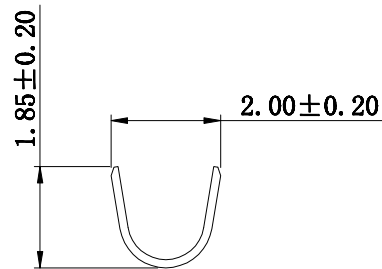


SECTION: A-A



SECTION: B-B



SECTION: C-C



SECTION: D-D

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.20

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

ZPD-T-24-LF
 SERIES | LEADFREE
 24~28 AWG
 TERMINAL

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com