



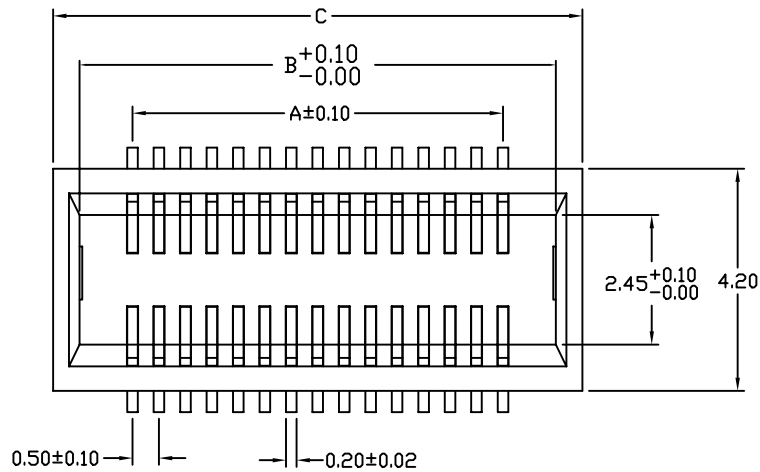


SPECIFICATIONS

Current Rating: 0.3 Amps
 Insulator resistance: 100 Megohms min.
 Contacts resistance: 60 m ohms max.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40~+85°C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic,UL 94V-0
 Finish:Gold plated
 ◎Standard:Gold flash all over

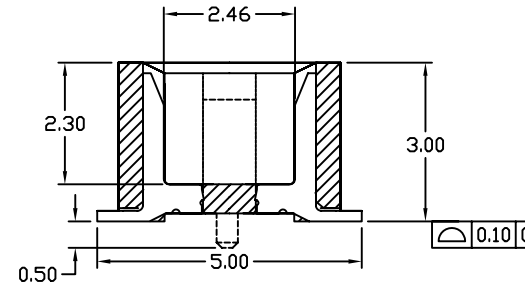

RECOMMEND P.C.B. LAYOUT(SCALE 4=1)

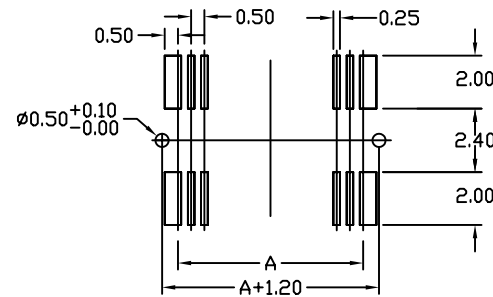

CIRCUITS	DIM A	DIM B	DIM C	W/O PEG	WITH PEG
10	2.00	4.00	5.00	○	○
12	2.50	4.50	5.50	○	○
14	3.00	5.00	6.00	○	○
16	3.50	5.50	6.50	○	○
18	4.00	6.00	7.00	○	○
20	4.50	6.50	7.50	○	○
22	5.00	7.00	8.00	○	○
24	5.50	7.50	8.50	○	○
26	6.00	8.00	9.00	○	○
28	6.50	8.50	9.50	○	○
30	7.00	9.00	10.00	○	○
32	7.50	9.50	10.50	○	○
34	8.00	10.00	11.00	○	○
36	8.50	10.50	11.50	○	○
38	9.00	11.00	12.00	○	○
40	9.50	11.50	12.50	○	○
42	10.00	12.00	13.00	○	○
44	10.50	12.50	13.50	○	○
46	11.00	13.00	14.00	○	○
48	11.50	13.50	14.50	○	○
50	12.00	14.00	15.00	○	○
52	12.50	14.50	15.50	○	○
54	13.00	15.00	15.50	○	○
56	13.50	15.50	16.50	○	○
58	14.00	16.00	17.00	○	○
60	14.50	16.50	17.50	○	○
62	15.00	17.00	18.00	○	○
64	15.50	17.50	18.50	○	○
66	16.00	18.00	19.00	○	○
68	16.50	18.50	19.50	○	○
70	17.00	19.00	20.00	○	○
72	17.50	19.50	20.50	○	○
74	18.00	20.00	21.00	○	○
76	18.50	20.50	21.50	○	○
78	19.00	21.00	22.00	○	○
80	19.50	21.50	22.50	○	○
82	20.00	22.00	23.00	○	○
84	20.50	22.50	23.50	○	○
86	21.00	23.00	24.00	○	○
88	21.50	23.50	24.50	○	○
90	22.00	24.00	25.00	○	○
92	22.50	24.50	25.50	○	○
94	23.00	25.00	26.00	○	○
96	23.50	25.50	26.50	○	○
98	24.00	26.00	27.00	○	○
100	24.50	26.50	27.50	○	○
102	25.00	27.00	28.00	○	○
104	25.50	27.50	28.50	○	○
106	26.00	28.00	29.00	○	○
108	26.50	28.50	29.50	○	○
110	27.00	29.00	30.00	○	○
112	27.50	29.50	30.50	○	○
114	28.00	30.00	31.00	○	○
116	28.50	30.50	31.50	○	○
118	29.00	31.00	32.00	○	○
120	29.50	31.50	32.50	○	○

MORETHANALL
 CONNECTORS
 ASSEMBLIES

煜倫有限公司

PART NO. ZV-P30-xxx

DWG NO. ZV-P30-xxx

FILE NO. ZVB-XXS1-X

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.25
 .XX ± 0.25
 .XXX ± 0.25
 AWG

DESCRIP TION:

0.5mm BOARD TO BOARD

AREA

REVISIONS

HK

DATE