



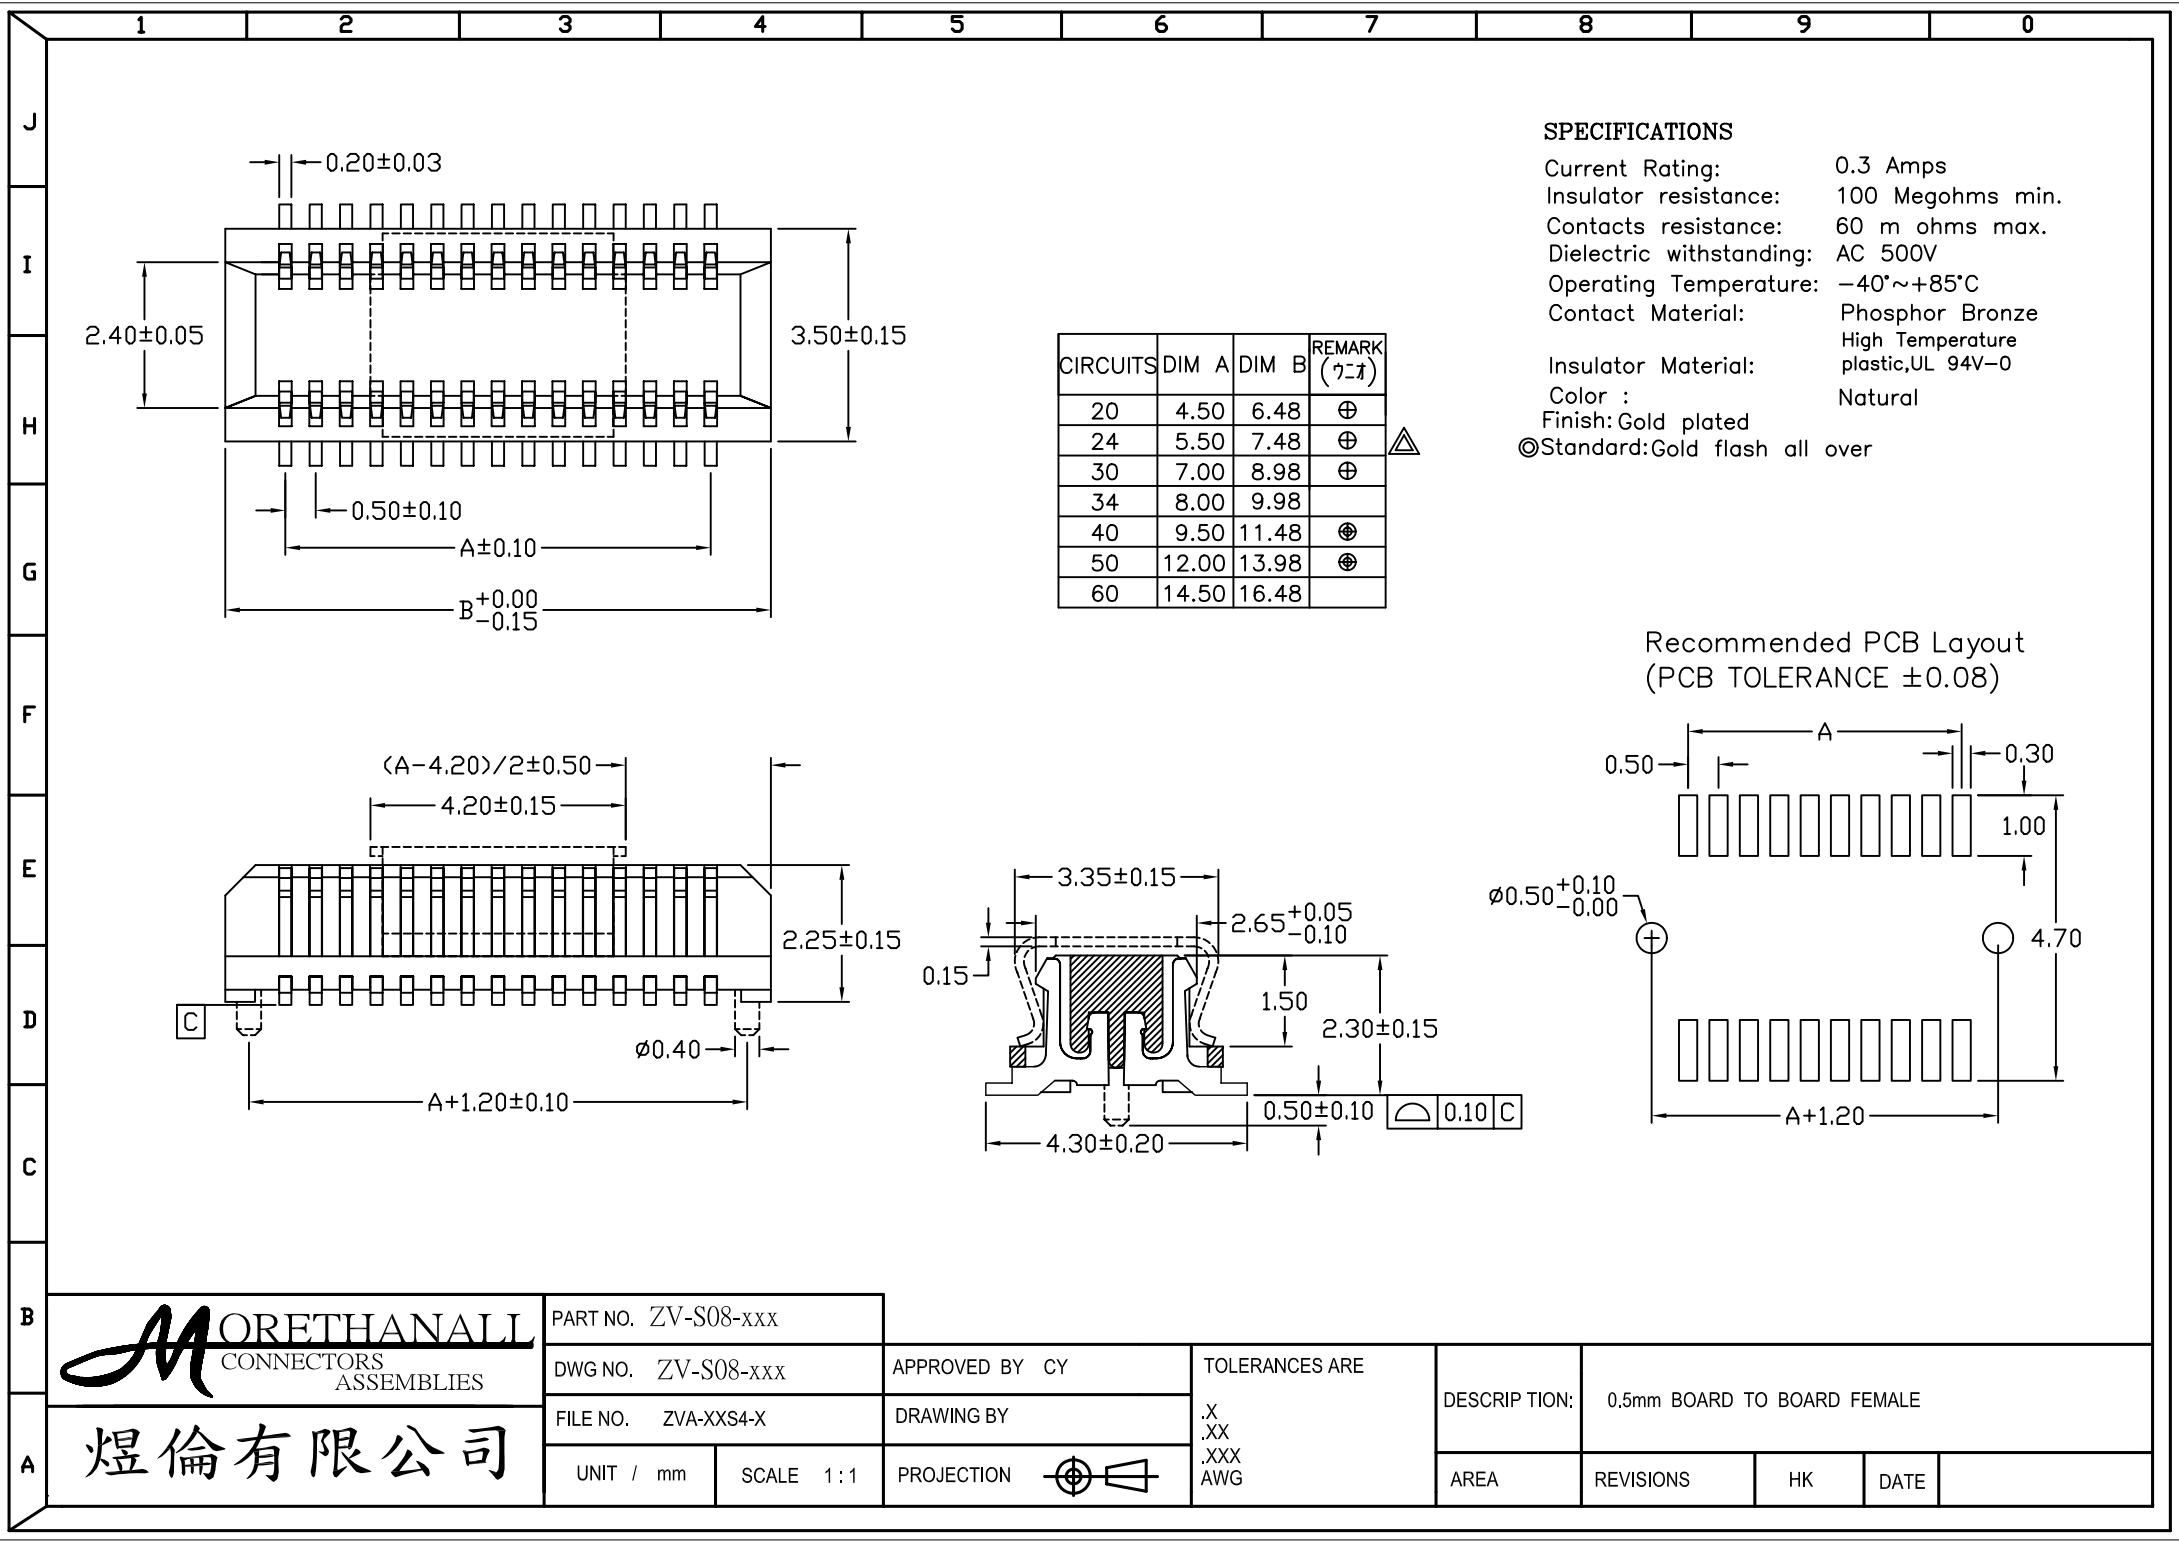


SPECIFICATIONS

Current Rating: 0.3 Amps
Insulator resistance: 100 Megohms min.
Contacts resistance: 60 m ohms max.
Dielectric withstanding: AC 500V
Operating Temperature: -40~+85°C
Contact Material: Phosphor Bronze
Insulator Material: High Temperature plastic,UL 94V-0
Color : Natural
Finish:Gold plated
◎Standard:Gold flash all over

CIRCUITS	DIM A	DIM B	REMARK (寸)
20	4.50	6.48	⊕
24	5.50	7.48	⊕
30	7.00	8.98	⊕
34	8.00	9.98	
40	9.50	11.48	⊕
50	12.00	13.98	⊕
60	14.50	16.48	

Recommended PCB Layout
(PCB TOLERANCE ±0.08)

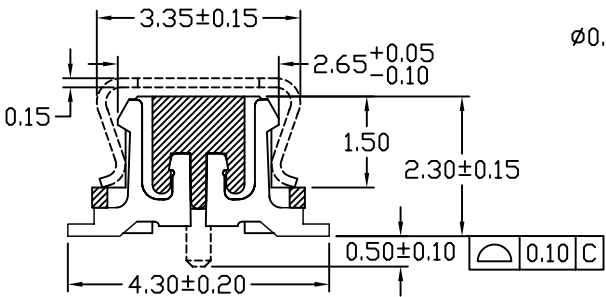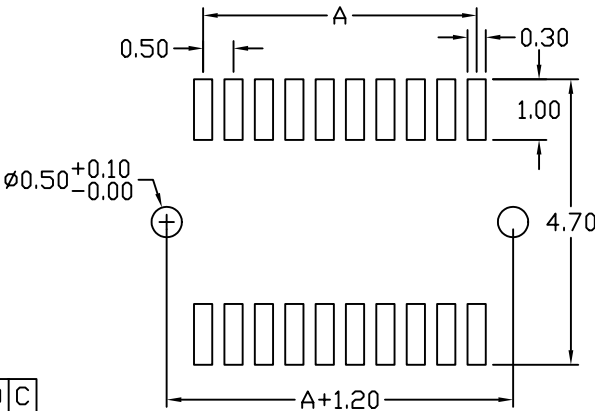

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. ZV-S08-xxx	
DWG NO. ZV-S08-xxx	
FILE NO. ZVA-XXS4-X	
UNIT / mm	SCALE 1:1

APPROVED BY CY	TOLERANCES ARE .X .XX .XXX AWG
DRAWING BY	
PROJECTION	

TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIP TION:	0.5mm BOARD TO BOARD FEMALE			
AREA	REVISIONS	HK	DATE	