
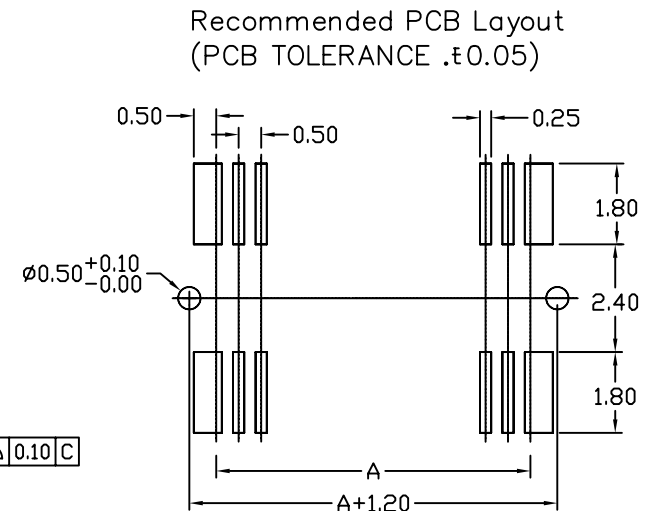
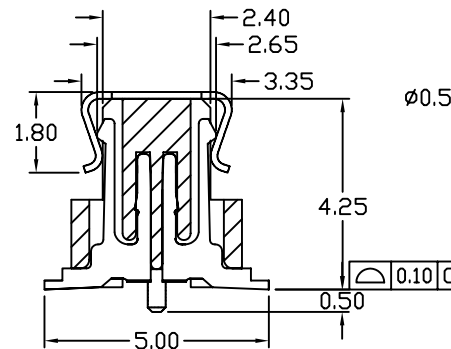
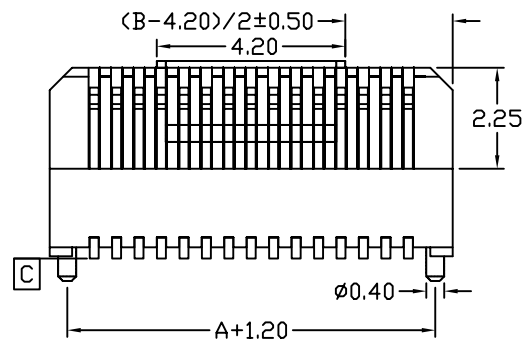
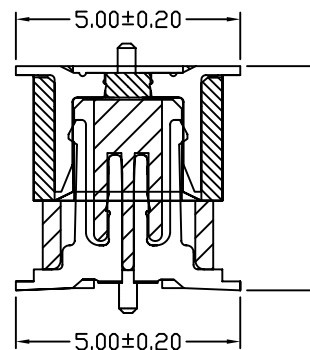


CIRCUITS	DIM A	DIM B	W/O PEG	WITH PEG
10	2.00	3.98		
12	2.50	4.48		
14	3.00	4.98		
16	3.50	5.48		
18	4.00	5.98		
20	4.50	6.48	●	●
22	5.00	6.98		
24	5.50	7.48		
26	6.00	7.98		
28	6.50	8.48		
30	7.00	8.98	●	●
32	7.50	9.48		
34	8.00	9.98	●	●
36	8.50	10.48		
38	9.00	10.98		
40	9.50	11.48	⊕	⊕
42	10.00	11.98		
44	10.50	12.48		
46	11.00	12.98		
48	11.50	13.48		
50	12.00	13.98		
52	12.50	14.48		
54	13.00	14.98		
56	13.50	15.48		
58	14.00	15.98		
60	14.50	16.48		
70	17.00	18.98		
80	19.50	21.48		
90	22.00	23.98		
100	24.50	26.48		
110	27.00	28.98		
120	29.50	31.48		

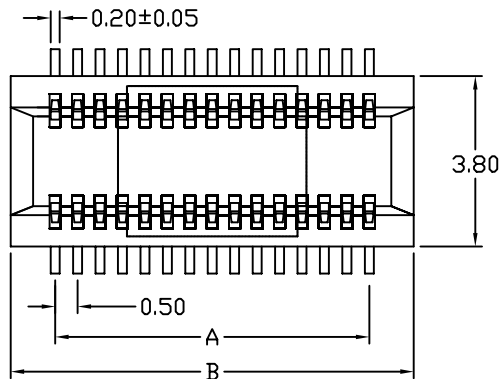

SPECIFICATIONS

Current Rating:	0.3 Amps
Insulator resistance:	100 Megohms min.
Contacts resistance:	60 m ohms max.
Dielectric withstanding:	AC 500V
Operating Temperature:	-40°~+85°C
Contact Material:	Phosphor Bronze
Insulator Material:	High Temperature Thermoplastic,UL 94V-0 Natural
Color:	
Finish:	Gold plated
©Standard:	Gold flash all over

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. ZV-S20-xxx

DWG NO. ZV-S20-xxx

FILE NO. ZVA-XXS8-XX

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X
.XX
.XXX
AWG

DESCRIP TION:

0.5mm BOARD TO BOARD FEMALE

AREA

REVISIONS

HK

DATE