
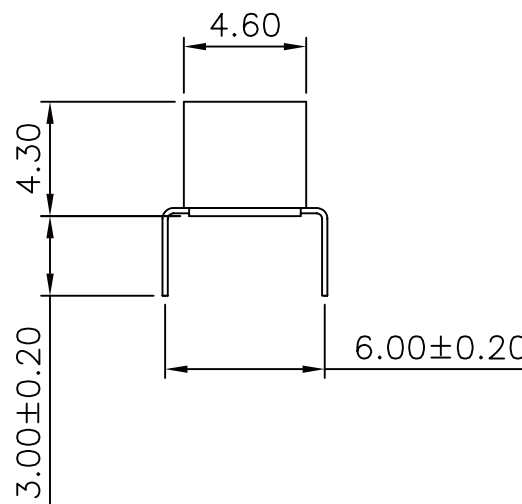
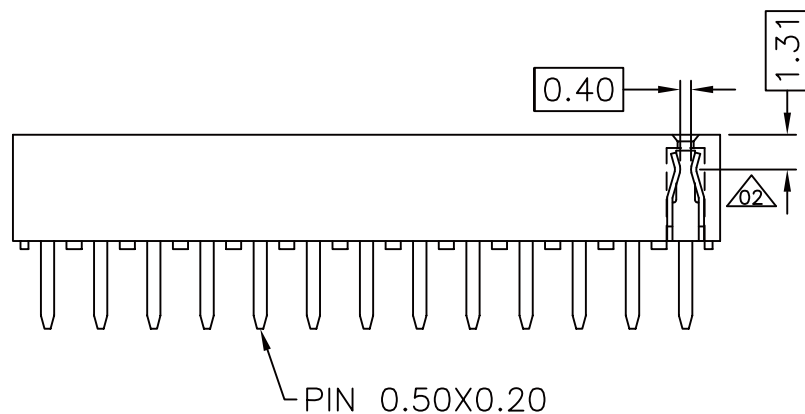


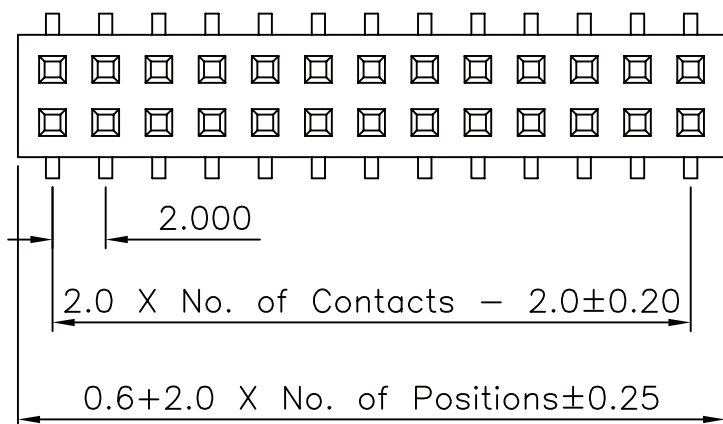

Specifications

Current Rating: 2Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0
NYLON-6T

Recommended P.C.Board

Hole Layout

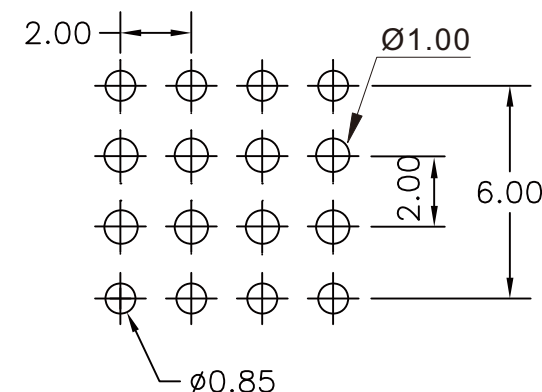

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

P PROJECTION



ORDER INFORMATION

S-B60-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X40:80WAY

BOTTOM ENTRY 6.0mm

DESCRIPTION: 2.00 FEMALE HEADER DUAL ROWS DIP IYPE BASE 4.30H