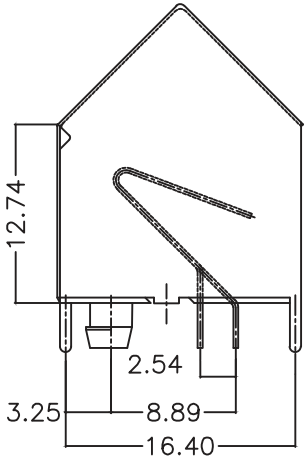

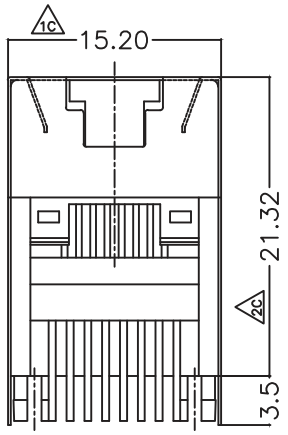

Electrical:
1.Voltage Rating:125 Vac Rms.
2.Current Rating:1.5 Amp.
3.Contact Resistance:40 Milliohms Max.
4.Insulation Resistance:1000 Megohms Min @500 Vdc.
5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:
1.Operating:750 Cycles Min.

Environmental:
1.Storage:−40°C To +85°C.
2.Opertion:−20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V−0.
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.
SHIELDED: BRASS WITH NICKEL PLATED



PCB LAYOUT/TOP VIEW

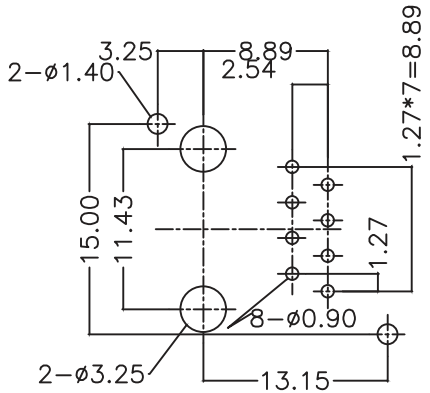

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ± 0.20
DATE		.XX ± 0.10
SIZE A4	PPOJECTION	.XXX ± ANG ±



ORDER INFORMATION

MJAF21-WX06A3-0808-LF

SERIES
WHITE
NON POST
06u" GOLD
FRONT TAB 3.25mm
8P8C
LEADFREE

DESCRIPTION: