## MATERIAL

**Insulator :** 30% Glass fiber PBT

**Contact Pin :** Brass

## SPECIFICATION

**Current Rate :** 1 AMP

**Insulation Resistance :** 5000MΩ Min. at DC 500V

**Contact Resistance :** 20mΩ Max. at DC 100mA

**Operation Temperature :** −55°C to +105°C

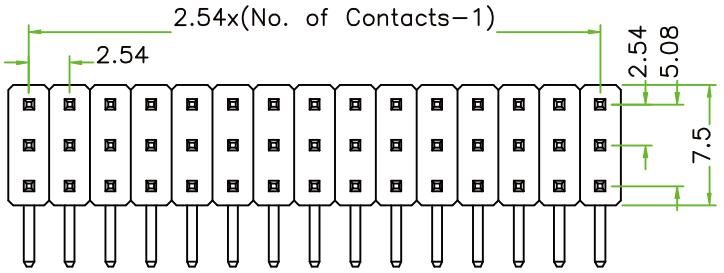


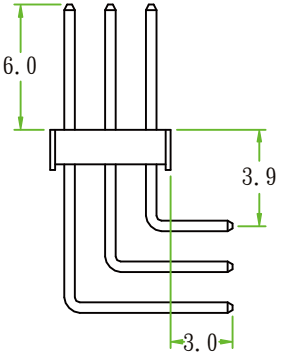


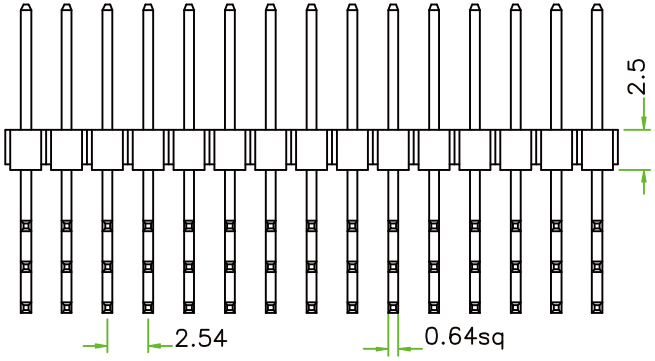


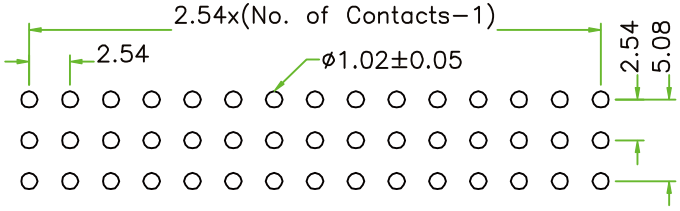


Recommended P.C.B. Layout

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

| | | |
|---|---|---|
| DRAWING BY CY | | TOLERANCES ARE |
| CHECKED BY GENIUS | | X. ± |
| UNIT / mm | SCALE 1 : 1 | .X ± |
| DATE | | .XX ± |
| SIZE A4 | PPOJECTION | .XXX ± |
| | | ANG ± |



**ORDER INFORMATION**

H-R-3Xxx-LF

- SERIES
- DIP 90°
- 3X02:06WAY
- 3X40:120WAY
- LEADFREE

DESCRIPTION: 2.54MM PIN HEADER RIGHT ANGLE TYPE