
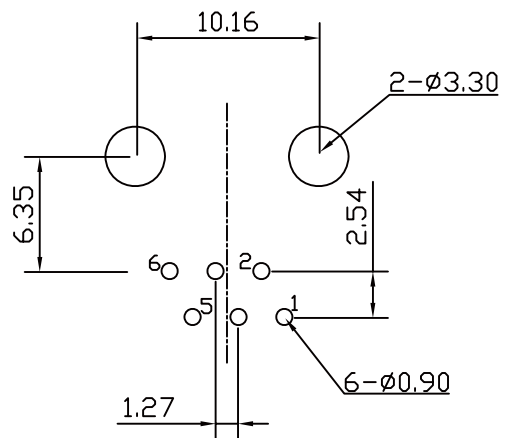
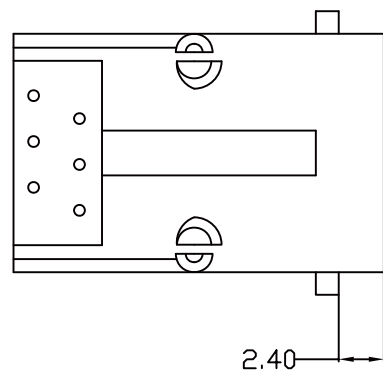
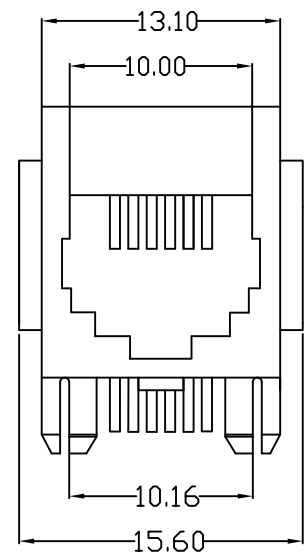


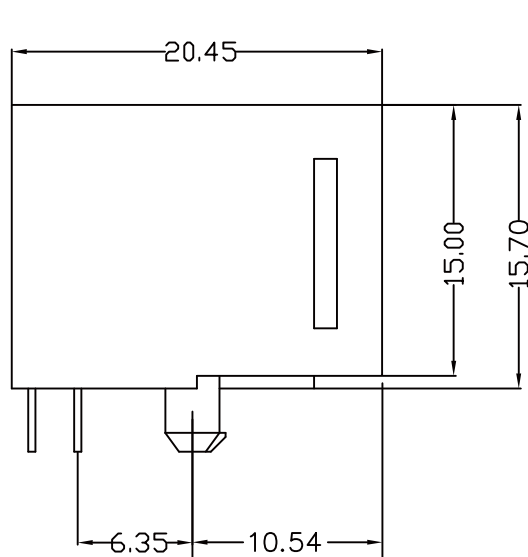

PCB LAYOUT/TOP VIEW


SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min



RoHS Compliant

TOLERANCES ARE

- X, ±
- .X ± 0.30
- .XX ± 0.20
- .XXX ±
- ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

ORDER INFORMATION

MJ15-Kx06-0606-LF

SERIES 06u" 6P6C LEADFREE
E:EAR GOLD
X:NON EAR
BLACK

DESCRIPTION: 6P Side Entry Modular Jack

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com