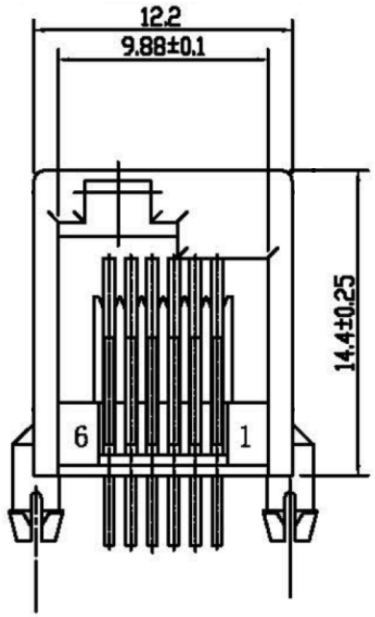

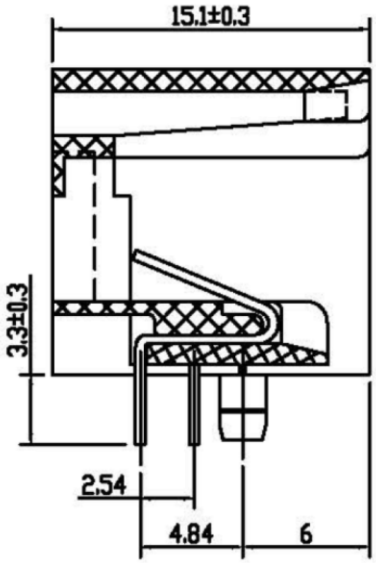

B向

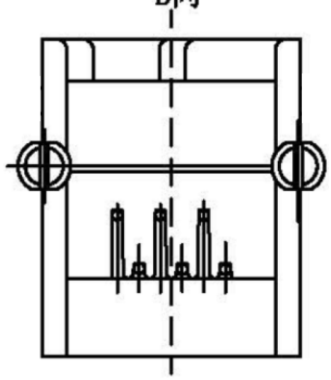

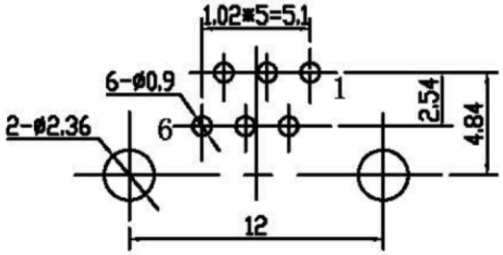

PCB LAYOUT
TOLERANCES: ±0.05

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20m MAX.
4. INSULATION RESISTANCE: 1000M MIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60 Hz FOR 1 MINUTE

MECHANICAL:

1. HOUSING&INSERT&MATERIAL:SEE TABLE
2. CONTACT MATERIAL:DIA. PHOSPHOR BRONZE ø=0.46MM
3. PLATING:GOLD PLATING AT CONTACT AREA, NICKEL 30U MIN. OVER ALL
4. OPERATING LIFE:750 CYCLES MIN.
5. MATING/UNMATING FORCE: 30N/3.06KG MAX.
6. RETENTION STRENGTH:50N MIN. FOR 60S±5S

ENVIRONMENTAL:

1. STORAGE:-40° C TO +85° C RELATIVE HUMIDITY<80%
2. GUARANTEE PERIOD:12 MONTHS
3. OPERATION: -40° C TO +85° C
4. WAVE SOLDERING TEMPERATURE: 260±5° C 5~10 SECONDS. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ± 0.50 .X ± 0.35 .XX ± 0.30 .XXX ± 0.20 ANG ± 1°
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

MJ14L-KX06-0606D-LF

- SERIES
- BLACK / NON EAR
- 06u"GOLD
- 6P6C
- D KEY TYPE
- LEADFREE

DESCRIPTION: