
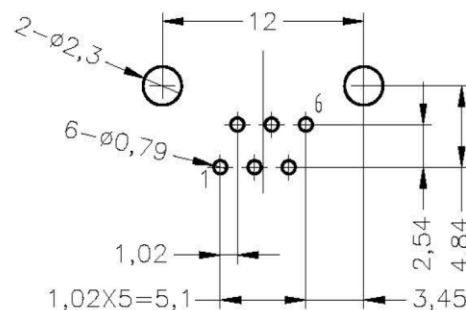



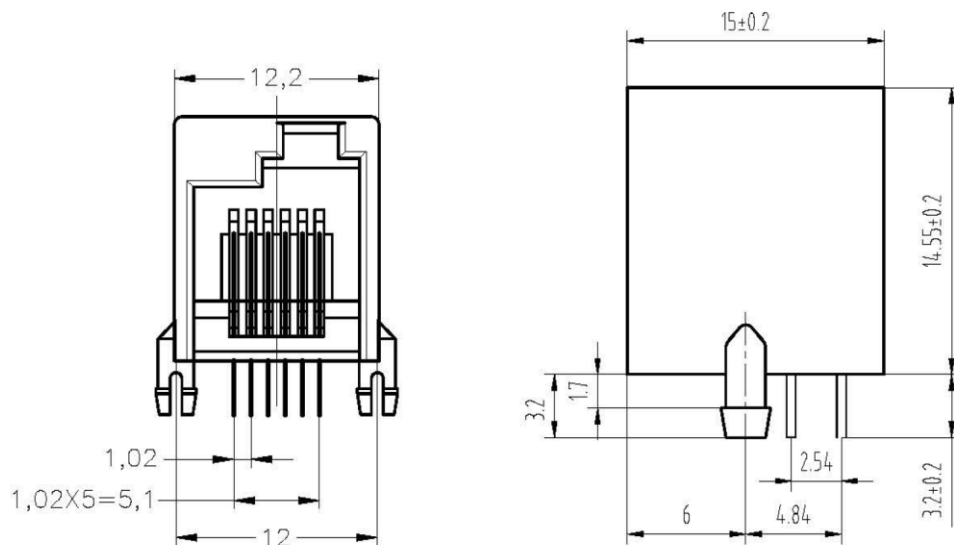

PCB LAYOUT

NOTES:

ELECTRICAL:

- | | |
|-------------------------|-------------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :1000 MEGOHMS MIN @ 500V DC . |
| 5.DIELECTRIC STRENGTH | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:

- | | |
|----------------------------|-------------------------------------|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER . |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE Ø0.46mm ROUND PIN. |
| 3.PLATING | :GOLD PLATING OVER NICKEL. |
| 4.OPERATING | :750 CYCLES MIN. |
| 5.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|---------------------|------------------|
| 1.Temperature Range | : -40℃~+85℃ |
| 2.Relative Humidity | : 90~95% (40±2℃) |

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION



ORDER INFORMATION

MJ14L-GX06-0606DR-LF

SERIES	6P6C	LEADFREE
	06u" GOLD	D TYPE RIGHT
	NON EAR	
	GRAY	

DESCRIPTION: