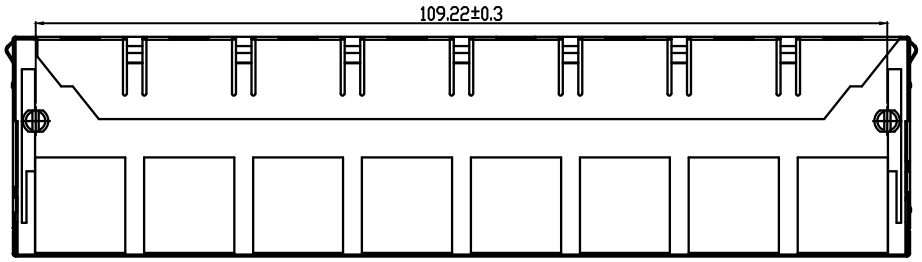

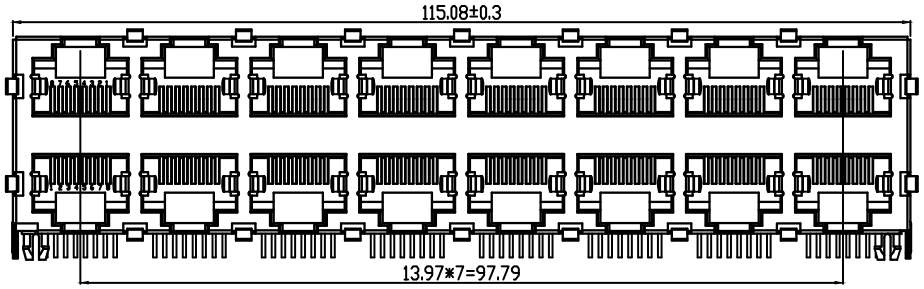



NOTES:
ELECTRICAL:
1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.
MECHANICAL:
1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: C5191(QSn6.5-0.1)PHOSPHOR BRONZE T=0.35mm.
3. PLATING: 1.CONTACT AREA-SELECTIVE GOLD PLATING.
: 2.TAILS PLATING TIN OVER NICKEL.
4. SHIELD: 0.20mm THICKNESS H65Y BRASS NICKEL PLATED.
5. MATING/UNMATING FORCE: 20N Max.
6. RETENTION STRENGTH: 50N pendant 60±5s.
7. OPERATING LIFE: 750 CYCLES MIN.
ENVIRONMENTAL:
1. STORAGE: -40℃ ～ +85℃ RELATIVE HUMIDITY<70%.
2. OPERATION: -40℃ ～ +85℃.

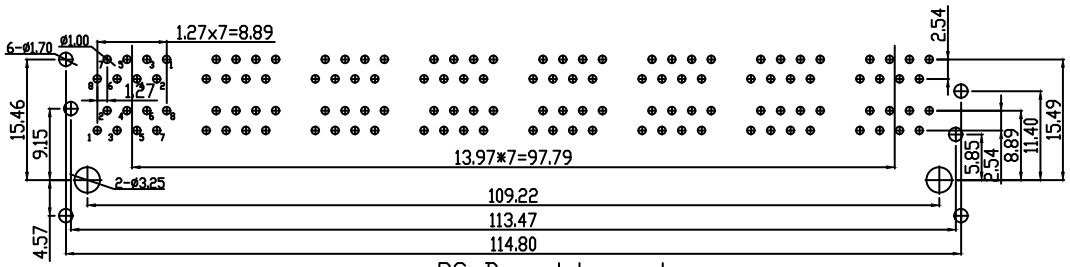

PC Board Layout

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±



ORDER INFORMATION

MJF25B8-KF06A4-0808-LF
- SERIES
- BLACK
- FULL SPRING
- 06u" GOLD
- FRONT TAB 4.57mm
- 8P8C
- LEADFREE

DESCRIPTION: 2X8 EMI 扁針