

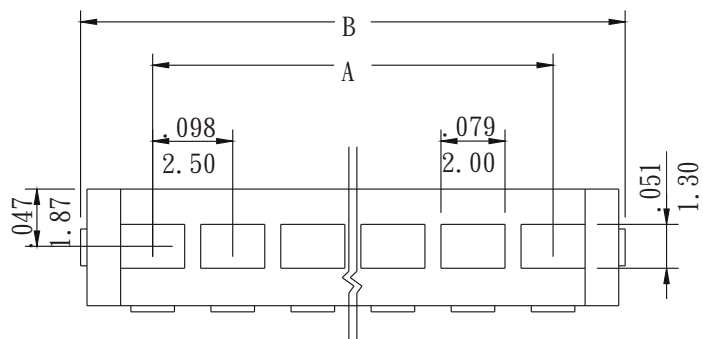
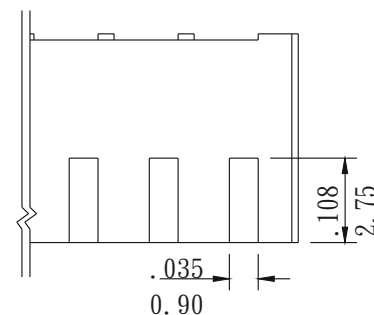




SCR Series Crimp Terminal Housings

- * Material : Nylon UL 94V-0
- * Current rating : 2A, AC/DC
- * Voltage rating : 125V, AC/DC
- * Standard color: Tan
- * 2-15 circuits available

inch
mm

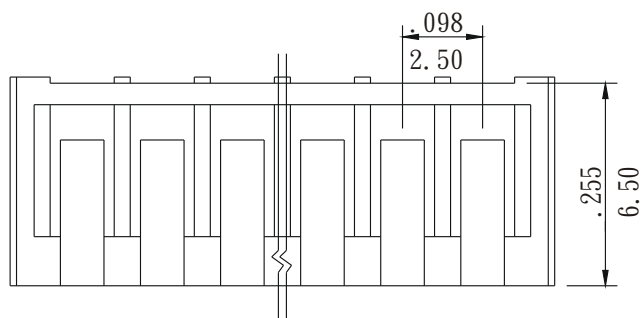

Dimensional information - inch/mm

Circuits	Dim. A		Dim. B		Circuits	Dim. A		Dim. B	
	inch	mm	inch	mm		inch	mm	inch	mm
2	0.098	2.50	0.276	7.00	9	0.787	20.00	0.965	24.50
3	0.197	5.00	0.374	9.50	10	0.886	22.50	1.063	27.00
4	0.295	7.50	0.472	12.00	11	0.984	25.00	1.161	29.50
5	0.394	10.00	0.571	14.50	12	1.083	27.50	1.260	32.00
6	0.492	12.50	0.669	17.00	13	1.181	30.00	1.358	34.50
7	0.591	15.00	0.768	19.50	14	1.280	32.50	1.457	37.00
8	0.689	17.50	0.866	22.00	15	1.378	35.00	1.555	39.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

SCR-H-xx-LF
SERIES | T LEADFREE
02~15 WAY
HOUSING

DESCRIPTION:

www.morethanall.com