
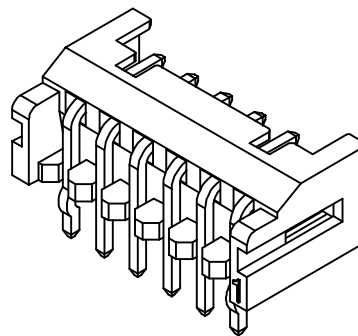
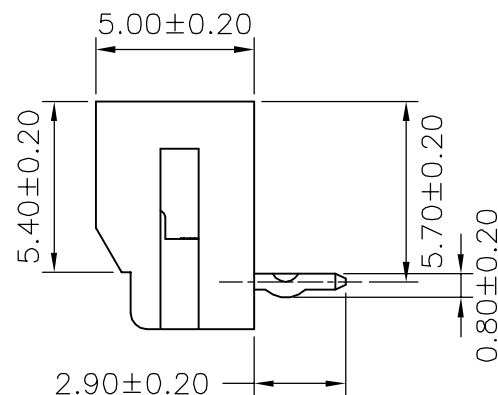
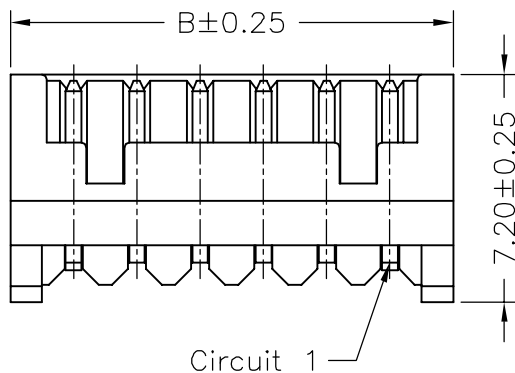



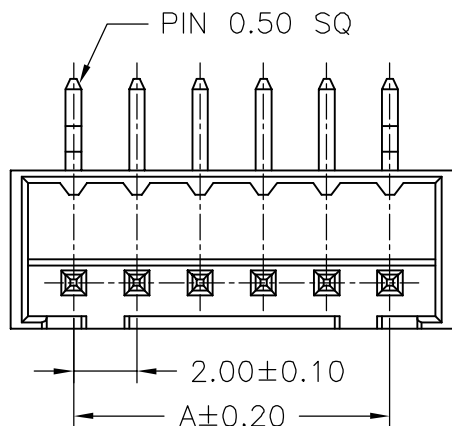

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 650V AC/minute

Pin Material: Brass/Gold-flash

Material: Nylon 6T,UL94V-0

Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
DF3-R-02	2.00	6.00
DF3-R-03	4.00	8.00
DF3-R-04	6.00	10.00
DF3-R-05	8.00	12.00
DF3-R-06	10.00	14.00
DF3-R-07	12.00	16.00
DF3-R-08	14.00	18.00
DF3-R-09	16.00	20.00
DF3-R-10	18.00	22.00
DF3-R-11	20.00	24.00
DF3-R-12	22.00	26.00
DF3-R-13	24.00	28.00
DF3-R-14	26.00	30.00
DF3-R-15	28.00	32.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

DF3-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: